

DMX Wash



DMX WASH DMX Wall Washer 36W/m

FEATURES

- This DMX led wall washer can be installed on the facade of shopping center, bank and bridge and so on.
- High-brightness CREE led is assembled in this LED fixture.
- RGB color, and White color (2700K-6500K) are available.
- Fixture length can be customized between Min 300mm to Max 1200mm.
- Apply solid capacitor of PCB for long life time.
- Save 40% power with more efficient power management design.
- Standard DMX512 control protocol (Max 44frames /second).
- DMX address can be set automatically and memorized also.
- The communication between led fixtures are synchronized perfectly under support of Artnet Controller.
- Protection: Hot pugging, and reverse connection.



WW362401





WW363001 - WW363003 - WW361204



SPECIFICATIONS

	WW362401
Size	1000x36x72 mm
Color	White 2700K-5700K
Led Q.ty	24 PCS
Beam angle	12°x30° -15°x38° - 10°x60°
Voltage	24V DC
Power	36W
Control	On-off/DMX 512/Dali/1-10v
Address Setting	Auto/Manual
DMX Channels	1
Housing Color	Black/White/Silver/Grey
Diffuser	4mm Toughened Glass
Cable Entry	Bottom
Operating Temperature	-20° to 50°C
Storage Temperature	-40° to 80°C
IP	IP67
Certificate	CE/ROHS

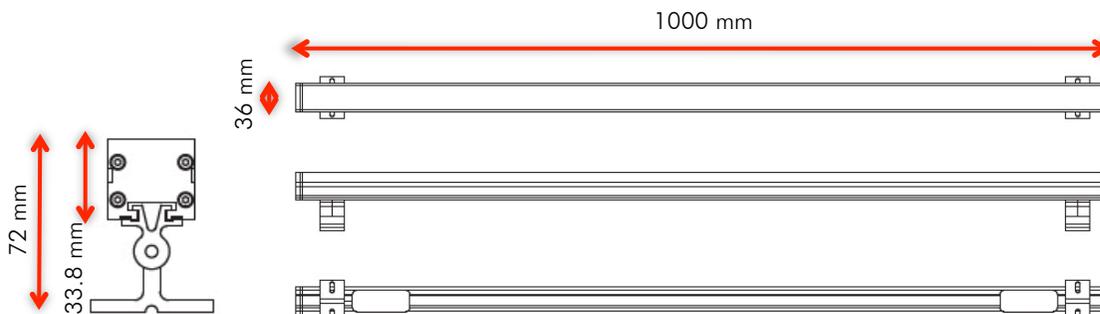

FWHM 15*38



FWHM 9*60



FWHM 12*30

WW362401 DMX WASH

SIZE: 39.37"x1.41"x2.83" (1000x36x72mm)

ORDER CODE: UNIALWW362401

ACCESSORIES



DMX WASH DMX Wall Washer 36W/m

SPECIFICATIONS

	WW363001	WW363003	WW361204
Size	1000x42.9x50.9 mm	1000x42.9x50.9 mm	1000x42.9x50.9 mm
Color	White 2700K-6000K	RGB	RGBW
Led Q.ty	30 PCS	30 PCS	12 PCS
Beam angle	12°x30°-15°x38°-10°x60	12°x30°-15°x38°-10°x60	28°x52°
Voltage	24V DC	24V DC	24V DC
Power	36W	36W	36W
Control	On-off/DMX 512/Dali/1-10v	DMX 512	DMX 512
Address Setting	Auto/Manual	Auto/Manual	Auto/Manual
DMX Channels	1	3	4
Housing Color	Black/White/Silver/Grey	Black/White/Silver/Grey	Black/White/Silver/Grey
Diffuser	4mm Toughened Glass	4mm Toughened Glass	4mm Toughened Glass
Cable Entry	Bottom	Bottom	Bottom
Operating Temperature	-20° to 50°C	-20° to 50°C	-20° to 50°C
Storage Temperature	-40° to 80°C	-40° to 80°C	-40° to 80°C
IP	IP67	IP67	IP67
Certificate	CE/ROHS	CE/ROHS	CE/ROHS

WW363001 DMX WASH


SIZE: 39.37"x16.88"x20" (1000x42.9x50.9mm)
ORDER CODE: UNIALWW363001

WW363003 DMX WASH

SIZE: 39.37"x16.88"x20" (1000x42.9x50.9mm)
ORDER CODE: UNIALWW363003

WW361204 DMX WASH


SIZE: 39.37"x16.88"x20" (1000x42.9x50.9mm)
ORDER CODE: UNIALWW361204

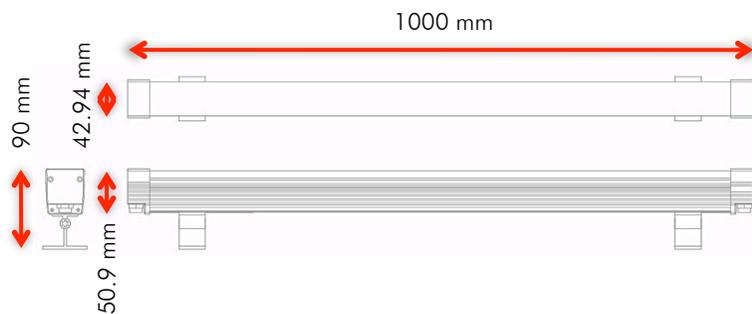

ACCESSORIES



CONNECTION



500MM长12W IES数据
IES for 500MM Long 12W




FWHM 15*38



FWHM 9*60



FWHM 12*30

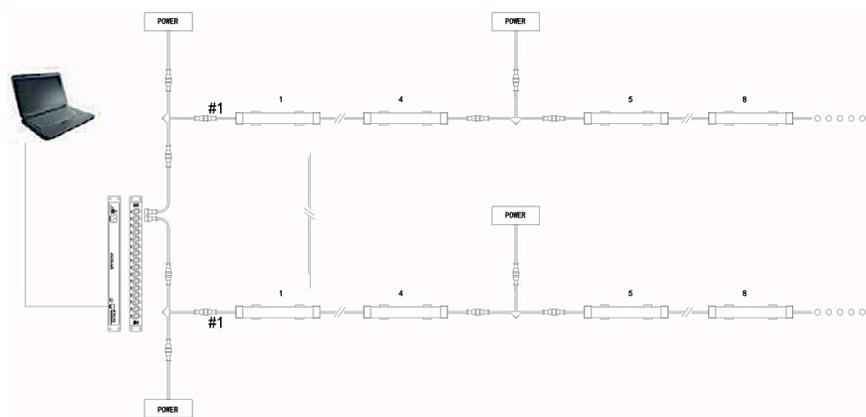

DMX WASH DMX Wall Washer 50W/m

FEATURES

- This DMX led wall washer can be installed on the facade of shopping center, bank and bridge and so on.
- High-brightness led is assembled in this LED fixture.
- RGB color, RGBW, RGBW 4 in 1, and White color (2700K-6500) are available.
- Fixture length can be customized between Min 300mm to Max 1200mm.
- Apply solid capacitor of PCB for long life time.
- DMX led wall washer can save 40% power with more efficient power management design.
- Standard DMX512 control protocol (Max 44frames /second).
- DMX address can be set automatically and memorized also.
- The communication between led fixtures are synchronized perfectly under support of Artnet Controller.
- Protection: Hot pugging, and reverse connection.

WW501204



WW503603




WW503601



SPECIFICATIONS


	WW503601	WW503603	WW501204
Size	1000x70x102 mm	1000x70x102 mm	1000x70x102 mm
Color	White 2700K-5700K	RGB	RGBW
Led Q.ty	36PCS	36PCS	12PCS
Beam angle	12°x30°-15°x38°-10°x60°	12°x30°-15°x38°-10°x60°	28°x52°
Voltage	48V DC	48V DC	48V DC
Power	50W/m	50W/m	50W/m
Control	On-off/DMX 512/Dali/1-10v	DMX 512	DMX 512
Address Setting	Auto/Manual	Auto/Manual	Auto/Manual
DMX Channels	1	3	4
Housing Color	Black/White/Silver/Grey	Black/White/Silver/Grey	Black/White/Silver/Grey
Diffuser	4mm Toughened Glass	4mm Toughened Glass	4mm Toughened Glass
Cable Entry	Side	Side	Side
Operating Temp.	-20° to 50°C	-20° to 50°C	-20° to 50°C
Storage Temp.	-40° to 80°C	-40° to 80°C	-40° to 80°C
IP	IP67	IP67	IP67
Certificate	CE/ROHS	CE/ROHS	CE/ROHS

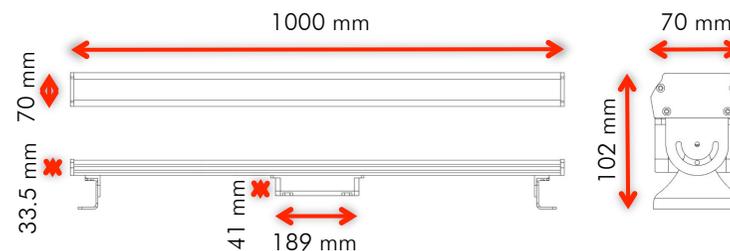

ACCESSORIES



CONNECTION

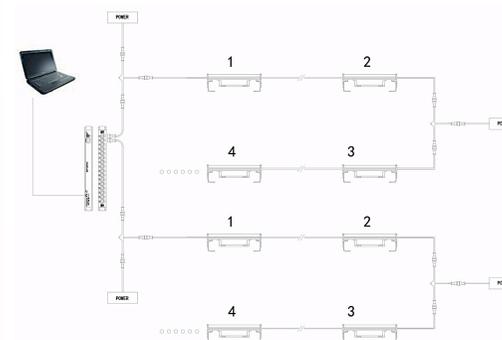

WW603601 DMX WASH

SIZE: 39.37"x2.75"x4.01" (1000x70x102mm)

ORDER CODE: UNIALWW503601

WW603603 DMX WASH


SIZE: 39.37"x2.75"x4.01" (1000x70x102mm)

ORDER CODE: UNIALWW503603

WW501204 DMX WASH

SIZE: 39.37"x2.75"x4.01" (1000x70x102mm)

ORDER CODE: UNIALWW501204

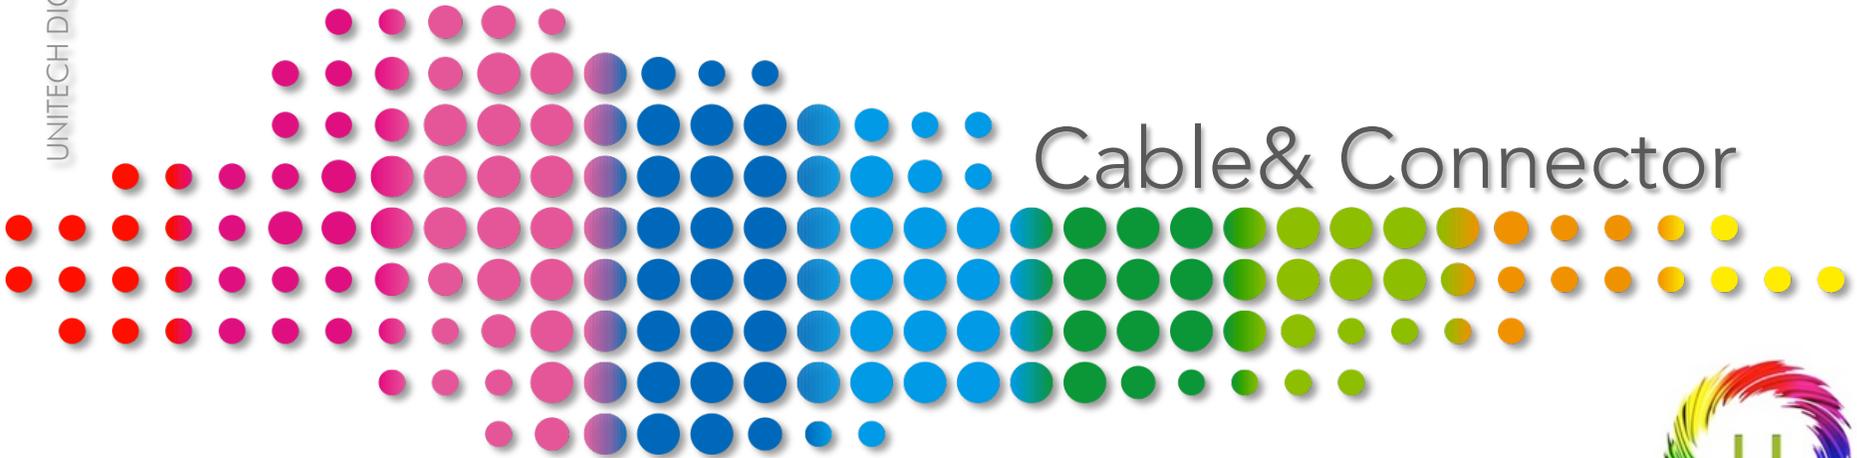

Cable & Connector



UNITECH
DIGITAL MEDIA

Cable & Connector

IP67 CONNECTOR PUSH LOCK



4PIN Extension Cable 67E4M4F
ORDER CODE: UNICPL67EM4F



T Connector for Signal&Power 67T5XM4F2M
ORDER CODE: UNICPL67T5XM4F2M



T Connector for Power 67T4M4F2M
ORDER CODE: UNICPL67T4M4F2M



2PIN Power Cable 67E2FB
ORDER CODE: UNICPL67E2FB

IP67 CONNECTOR SCREW LOCK



2PIN Power Cable 67E2FB
ORDER CODE: UNICSL67E2FB



T Connector for Signal&Power 67T5XM4F2M
ORDER CODE: UNICSL67T5XM4F2M



T Connector for Power 67T4M4F2M
ORDER CODE: UNICSL67T4M4F2M

IP65 CONNECTOR SCREW LOCK



2PIN Power Cable 65E2FB
ORDER CODE: UNICSL65E2FB



T Connector for Signal&Power 65T5XM4F2M
ORDER CODE: UNICSL65T5XM4F2M



T Connector for Power 65T4M4F2M
ORDER CODE: UNICSL65T4M4F2M



T Connector for LED Fixture 65T4M4F4F
ORDER CODE: UNICSL65T4M4F4F

NO WATERPROOF CONNECTOR



5PIN XLR Female – CD – XLR5F
ORDER CODE: UNINWCXLR5F



5PIN XLR Male – CD – XLR5M
ORDER CODE: UNINWCXLR5M



3PIN XLR Female – CD – XLR3F
ORDER CODE: UNINWCXLR3F



3PIN XLR Male – CD – XLR3M
ORDER CODE: UNIAC67E2FB



T Connector for Signal&Power
 NWT5XM4F2M
ORDER CODE: UNINWT5XM4F2M



4PIN Extension Cable NWE4M4F
ORDER CODE: UNINWE4M4F



Signal Cable NWE5XM3SF
ORDER CODE: UNINWE5XM3SF

Power Supply

LRS



LRS Power Supply

ORDER CODE: UNIPSLRS150

Wattage	LRS 150W
Features	Economical non-PFC models Miniature size with complete protections Most economical models with complete safety certificates
DC Voltage	DC12V DC24V

SP



SP Power Supply

ORDER CODE: UNIPSSP150

Wattage	SP 150W
Features	Built-in active PFC function Full range input, complete functions
DC Voltage	DC12V DC24V

HLG



HLG Power Supply

ORDER CODE: UNIPSHLG150

Wattage	HQ 150W
Features	90-305VAC input, built-in active PFC function Metal case, IP67/IP65 design for indoor or outdoor installations
DC Voltage	DC12V DC24V