




# DMX Light Line

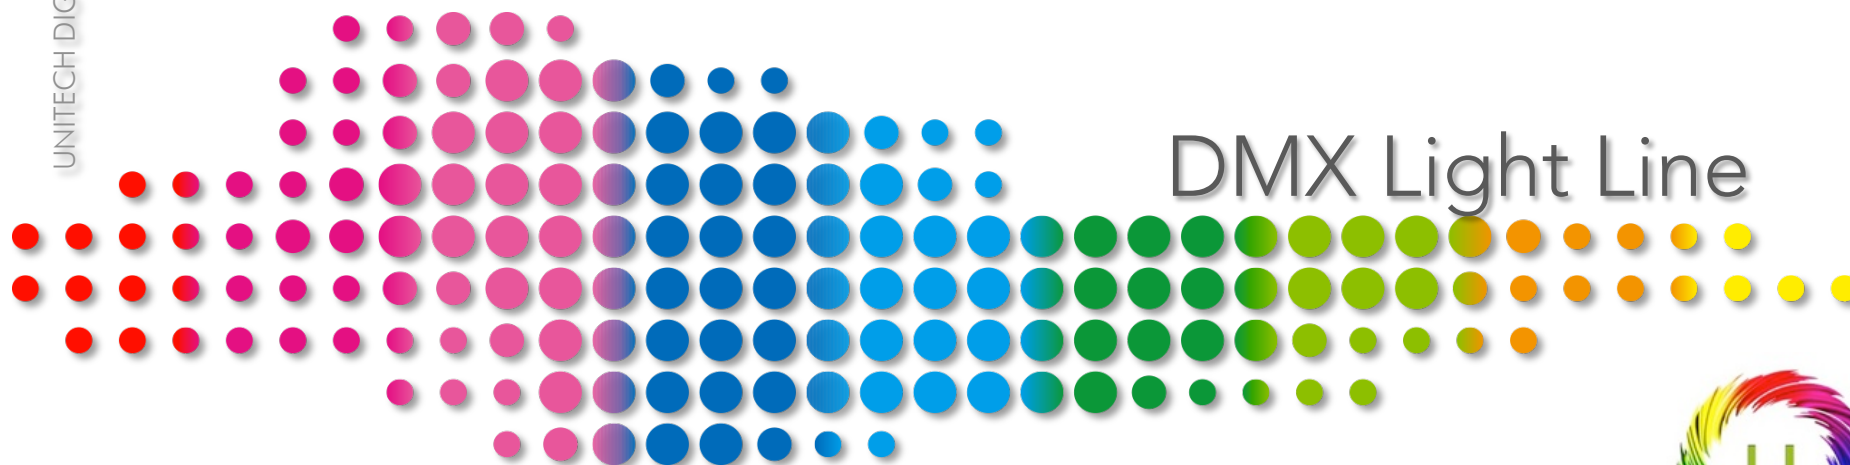

unitech  
digitalmedia

# DMX LIGHT LINE

## DMX Light Line 18mm

### FEATURES

- These DMX linear can be installed on the facade or in the ground of shopping center, bank and bridge, etc.
- Top brand Glue for better heatconduction, strong temperature withstand and perfect waterproof performance.
- High-brightness IPX6 SMD LED are assembled in this fixture.
- Apply solid capacitor of PCB for long life time.
- Save 40% power with more efficient power management design.
- Wide working voltage range DC12V-DC24V.
- Standard DMX512 control protocol (Max 44frames /second).
- DMX address can be set automatically and memorized also.
- The communication between led fixtures are synchronized perfectly under support of Artnet Controller.
- Protection: Hot pugging, and reverse connection.

DL186001 – DL181202 – DL186003 – DL186004

DMX LIGHT LINE 18mm



DLMS186003




DMX LIGHT LINE 18mm



## SPECIFICATIONS

|                 | DL186001               | DL181202                     | DL186003               | DL186004               | DLMS186003             |
|-----------------|------------------------|------------------------------|------------------------|------------------------|------------------------|
| Size            | 1000x18x19 mm          | 1000x18x19 mm                | 1000x18x19 mm          | 1000x18x19 mm          | 1000x18x38 mm          |
| Color           | White2700K-5700K       | Dynamic White<br>2700K-6000K | RGB                    | RGBW                   | RGB                    |
| Led             | SDM 5050               | SDM 5050                     | SDM 5050               | SDM 5050               | SDM 5050               |
| Led Q.ty        | 60                     | 120                          | 60                     | 60                     | 60                     |
| View angle      | 120°                   | 120°                         | 120°                   | 120°                   | 120°                   |
| Voltage         | 24V DC                 | 24V DC                       | 24V DC                 | 24V DC                 | 24V DC                 |
| Power           | 12W                    | 12W                          | 12W                    | 12W                    | 12W                    |
| Control         | On-Off/DMX 512         | DMX 512                      | DMX 512                | DMX 512                | DMX 512                |
| Address Setting | Auto/Manual            | Auto/Manual                  | Auto/Manual            | Auto/Manual            | Auto/Manual            |
| Pixel/m         | 1/2/4/5/10/20          | 1/2/4/5/10                   | 1/2/4/5/10/20          | 1/2/4/5/10             | 1/2/4/5/10             |
| Housing Color   | Silver                 | Silver                       | Silver                 | Silver                 | Silver                 |
| Diffuser        | Clear PC/ Dome Opal PC | Clear PC/ Dome Opal PC       | Clear PC/ Dome Opal PC | Clear PC/ Dome Opal PC | Clear PC/ Dome Opal PC |
| Cable Entry     | Bottom                 | Bottom                       | Bottom                 | Bottom                 | Bottom                 |
| Operating Temp  | -20° to 50°C           | -20° to 50°C                 | -20° to 50°C           | -20° to 50°C           | -20° to 50°C           |
| Storage Temp.   | -40° to 80°C           | -40° to 80°C                 | -40° to 80°C           | -40° to 80°C           | -40° to 80°C           |
| IP              | IP67                   | IP67                         | IP67                   | IP67                   | IP67                   |
| Certificate     | CE/ROHS                | CE/ROHS                      | CE/ROHS                | CE/ROHS                | CE/ROHS                |

# DMX LIGHT LINE

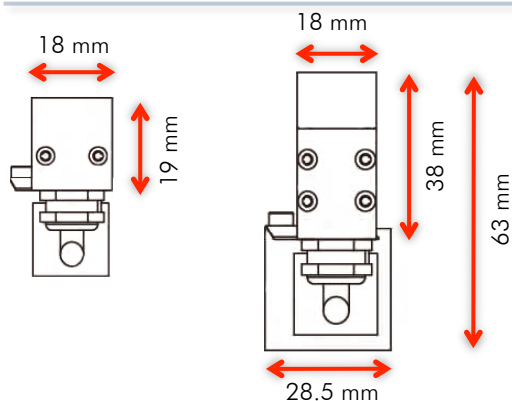

## DL186001 DMX LIGHT LINE 18mm

**SIZE:** 39.37"x0.7"x0.74" (1000x18x19mm)

**ORDER CODE:** UNIALDL186001

## DL181202 DMX LIGHT LINE 18mm

**SIZE:** 39.37"x0.7"x0.74" (1000x18x19mm)

**ORDER CODE:** UNIALDL181202

## DL186003 DMX LIGHT LINE 18mm

**SIZE:** 39.37"x0.7"x0.74" (1000x18x19mm)

**ORDER CODE:** UNIALDL180603

## DL186004 DMX LIGHT LINE 18mm

**SIZE:** 39.37"x0.7"x0.74" (1000x18x19mm)

**ORDER CODE:** UNIALDL186004

## DLMS186003 DMX LIGHT LINE 18mm


**SIZE:** 39.37"x0.7"x1.49" (1000x18x38mm)

**ORDER CODE:** UNIALDLMS186003

## ACCESSORIES



## CONNECTION

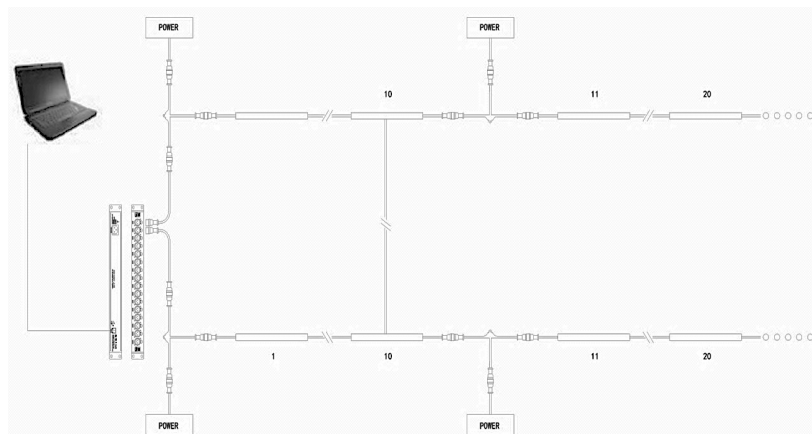

# DMX LIGHT LINE

## DMX Light Line 28mm

### FEATURES

- These DMX linear can be installed on the facade or in the ground of shopping center, bank and bridge, etc.
- Top brand Glue for better heatconduction, strong temperature withstand and perfect waterproof performance.
- High-brightness IPX6 SMD LED are assembled in this fixture.
- Apply solid capacitor of PCB for long life time.
- Save 40% power with more efficient power management design.
- Wide working voltage range DC12V-DC24V.
- Standard DMX512 control protocol (Max 44frames /second).
- DMX address can be set automatically and memorized also.
- The communication between led fixtures are synchronized perfectly under support of Artnet Controller.
- Protection: Hot pugging, and reverse connection.

DL286001 – DL281202 – DL286003 – DL286004 – DL283203 – DL284803  
DMX LIGHT LINE 28mm



DLMF289601  
DMX LIGHT LINE 28mm



DLMF289603  
DMX LIGHT LINE 28mm



DLM286003 – DLM284803  
DMX LIGHT LINE 28mm



DLMS286003  
DMX LIGHT LINE 28mm



# DMX LIGHT LINE

## DMX Light Line 28mm

### SPECIFICATIONS



|                 | DL286001                                 | DL281202                     | DL286003                  | DL286004                  | DL283203                  | DL284803                  |
|-----------------|------------------------------------------|------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Size            | 1000x28x25 mm                            | 1000x28x25 mm                | 1000x28x25 mm             | 1000x28x25 mm             | 1000x28x25 mm             | 1000x28x25 mm             |
| Color           | White2700K-5700K                         | Dynamic White<br>2700K-6000K | RGB                       | RGBW                      | RGB                       | RGB                       |
| Led             | SDM 5050                                 | SDM 5050                     | SDM 5050                  | SDM 5050                  | SDM 5050                  | SDM 5050                  |
| Led Q.ty        | 60                                       | 120                          | 60                        | 60                        | 32                        | 48                        |
| View angle      | 120°                                     | 120°                         | 120°                      | 120°                      | 120°                      | 120°                      |
| Voltage         | 24V DC                                   | 24V DC                       | 24V DC                    | 24V DC                    | 24V DC                    | 24V DC                    |
| Power           | 12W                                      | 12W                          | 12W                       | 12W                       | 12W                       | 12W                       |
| Control         | On-Off/DMX 512                           | DMX 512                      | DMX 512                   | DMX 512                   | DMX 512                   | DMX 512                   |
| Address Setting | Auto/Manual                              | Auto/Manual                  | Auto/Manual               | Auto/Manual               | Auto/Manual               | Auto/Manual               |
| Pixel/m         | 1/2/4/5/10/20                            | 1/2/4/5/10                   | 1/2/4/5/10/20             | 1/2/4/5/10                | 1/8/16                    | 1/2/4/8/16                |
| Housing Color   | Silver                                   | Silver                       | Silver                    | Silver                    | Silver                    | Silver                    |
| Diffuser        | Clear PC/ Dome Opal<br>PC/Square Acrylic | Clear PC/ Dome Opal<br>PC    | Clear PC/ Dome Opal<br>PC | Clear PC/ Dome Opal<br>PC | Clear PC/ Dome Opal<br>PC | Clear PC/ Dome Opal<br>PC |
| Cable Entry     | Bottom/Side                              | Bottom/Side                  | Bottom/Side               | Bottom/Side               | Bottom/Side               | Bottom/Side               |
| Operating Temp  | -20° to 50°C                             | -20° to 50°C                 | -20° to 50°C              | -20° to 50°C              | -20° to 50°C              | -20° to 50°C              |
| Storage Temp.   | -40° to 80°C                             | -40° to 80°C                 | -40° to 80°C              | -40° to 80°C              | -40° to 80°C              | -40° to 80°C              |
| IP              | IP67                                     | IP67                         | IP67                      | IP67                      | IP67                      | IP67                      |
| Certificate     | CE/ROHS                                  | CE/ROHS                      | CE/ROHS                   | CE/ROHS                   | CE/ROHS                   | CE/ROHS                   |

## SPECIFICATIONS


|                 | DLM286003       | DLM284803       | DLMS286003     | DLMF289601                                      | DLMF289603    |
|-----------------|-----------------|-----------------|----------------|-------------------------------------------------|---------------|
| Size            | 1000x28x27.4 mm | 1000x28x27.4 mm | 1000x28x38 mm  | 1000x28x38 mm<br>1000x35x69 mm with<br>brackets | 1000x28x35 mm |
| Color           | RGB             | RGB             | RGB            | White2700K-5700K                                | RGB           |
| Led             | SDM 5050        | SDM 5050        | SDM 5050       | SDM 5050                                        | SDM 5050      |
| Led Q.ty        | 60              | 48              | 60             | 96                                              | 96            |
| View angle      | 120°            | 120°            | 120°           | 120°                                            | 120°          |
| Voltage         | 24V DC          | 24V DC          | 24V DC         | 24V DC                                          | 24V DC        |
| Power           | 12W             | 12W             | 12W            | 12W                                             | 12W           |
| Control         | DMX 512         | DMX 512         | DMX 512        | On-Off/DMX 512                                  | DMX 512       |
| Address Setting | Auto/Manual     | Auto/Manual     | Auto/Manual    | Auto/Manual                                     | Auto/Manual   |
| Pixel/m         | 1/2/4/5/10/20   | 8/16            | 1/2/4/5/10     | 1/2/4/8/16/32                                   | 1/2/4/8/16/32 |
| Housing Color   | Silver          | Silver          | Silver         | Silver                                          | Silver        |
| Diffuser        | Opal PC         | Opal PC         | Square Opal PC | Opal                                            | Opal          |
| Cable Entry     | Bottom          | Bottom          | Bottom         | Bottom                                          | Bottom        |
| Operating Temp  | -20° to 50°C    | -20° to 50°C    | -20° to 50°C   | -20° to 50°C                                    | -20° to 50°C  |
| Storage Temp.   | -40° to 80°C    | -40° to 80°C    | -40° to 80°C   | -40° to 80°C                                    | -40° to 80°C  |
| IP              | IP67            | IP67            | IP67           | IP67                                            | IP67          |
| Certificate     | CE/ROHS         | CE/ROHS         | CE/ROHS        | CE/ROHS                                         | CE/ROHS       |

# DMX LIGHT LINE DMX Light Line 28mm


## DL28XXXX

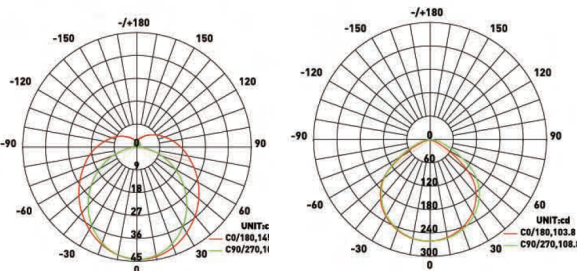


## DLM28XXXX



## DLMS28XXXX



## DLMF28XXXX



## ACCESSORIES



## DLM286003 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x1.43"(1000x28x36.4mm)

ORDER CODE: UNIALDLM286003

## DLM284803 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x1.43"(1000x28x36.4mm)

ORDER CODE: UNIALDLM284803

## DLMS286003 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x1.49"(1000x28x38mm)

ORDER CODE: UNIALDLM286003

## DLMF289601 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x1.49"(1000x28x38mm)

ORDER CODE: UNIALDLMF289601

## DLMF289603 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x1.37"(1000x28x35mm)

ORDER CODE: UNIALDLMF289603

## DL286001 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x0.98"(1000x28x25mm)

ORDER CODE: UNIALDL286001

## DL281202 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x0.98"(1000x28x25mm)

ORDER CODE: UNIALDL281202

## DL286003 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x0.98"(1000x28x25mm)

ORDER CODE: UNIALDL286003

## DL186004 DMX LIGHT LINE 18mm

SIZE: 39.37"x1.1"x0.98"(1000x28x25mm)

ORDER CODE: UNIALDL186004

## DL283203 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x0.98"(1000x28x25mm)

ORDER CODE: UNIALDL283203

## DL284803 DMX LIGHT LINE 28mm

SIZE: 39.37"x1.1"x0.98"(1000x28x25mm)

ORDER CODE: UNIALDL284803



# Cable& Connector



unitech  
digitalmedia

# Cable & Connector

## IP67 CONNECTOR PUSH LOCK



4PIN Extension Cable 67E4M4F  
**ORDER CODE:** UNICPL67EM4F



T Connector for Signal&Power 67T5XM4F2M  
**ORDER CODE:** UNICPL67T5XM4F2M



T Connector for Power 67T4M4F2M  
**ORDER CODE:** UNICPL67T4M4F2M



2PIN Power Cable 67E2FB  
**ORDER CODE:** UNICPL67E2FB

## IP67 CONNECTOR SCREW LOCK



2PIN Power Cable 67E2FB  
**ORDER CODE:** UNICSL67E2FB



T Connector for Signal&Power 67T5XM4F2M  
**ORDER CODE:** UNICSL67T5XM4F2M



T Connector for Power 67T4M4F2M  
**ORDER CODE:** UNICSL67T4M4F2M

## IP65 CONNECTOR SCREW LOCK



2PIN Power Cable 65E2FB  
**ORDER CODE:** UNICSL65E2FB



T Connector for Signal&Power 65T5XM4F2M  
**ORDER CODE:** UNICSL65T5XM4F2M



T Connector for Power 65T4M4F2M  
**ORDER CODE:** UNICSL65T4M4F2M



T Connector for LED Fixture 65T4M4F4F  
**ORDER CODE:** UNICSL65T4M4F4F

## NO WATERPROOF CONNECTOR



5PIN XLR Female – CD – XLR5F  
**ORDER CODE:** UNINWCXLR5F



5PIN XLR Male – CD – XLR5M  
**ORDER CODE:** UNINWCXLR5M



3PIN XLR Female – CD – XLR3F  
**ORDER CODE:** UNINWCXLR3F



3PIN XLR Male – CD – XLR3M  
**ORDER CODE:** UNIAC67E2FB



T Connector for Signal&Power  
NWT5XM4F2M  
**ORDER CODE:** UNINWT5XM4F2M



4PIN Extension Cable NWE4M4F  
**ORDER CODE:** UNINWE4M4F



Signal Cable NWE5XM3SF  
**ORDER CODE:** UNINWE5XM3SF

# Power Supply

## LRS



### LRS Power Supply

**ORDER CODE:** UNIPSLRS150

|            |                                                          |
|------------|----------------------------------------------------------|
| Wattage    | LRS 150W                                                 |
| Features   | Economical non-PFC models                                |
|            | Miniature size with complete protections                 |
|            | Most economical models with complete safety certificates |
| DC Voltage | DC12V DC24V                                              |

## SP



### SP Power Supply

**ORDER CODE:** UNIPSSP150

|            |                                      |
|------------|--------------------------------------|
| Wattage    | SP 150W                              |
| Features   | Built-in active PFC function         |
|            | Full range input, complete functions |
| DC Voltage | DC12V DC24V                          |

## HLG



### HLG Power Supply

**ORDER CODE:** UNIPSHLG150

|            |                                                                  |
|------------|------------------------------------------------------------------|
| Wattage    | HQ 150W                                                          |
| Features   | 90-305VAC input, built-in active PFC function                    |
|            | Metal case, IP67/IP65 design for indoor or outdoor installations |
| DC Voltage | DC12V DC24V                                                      |