




S series Indoor Led Display

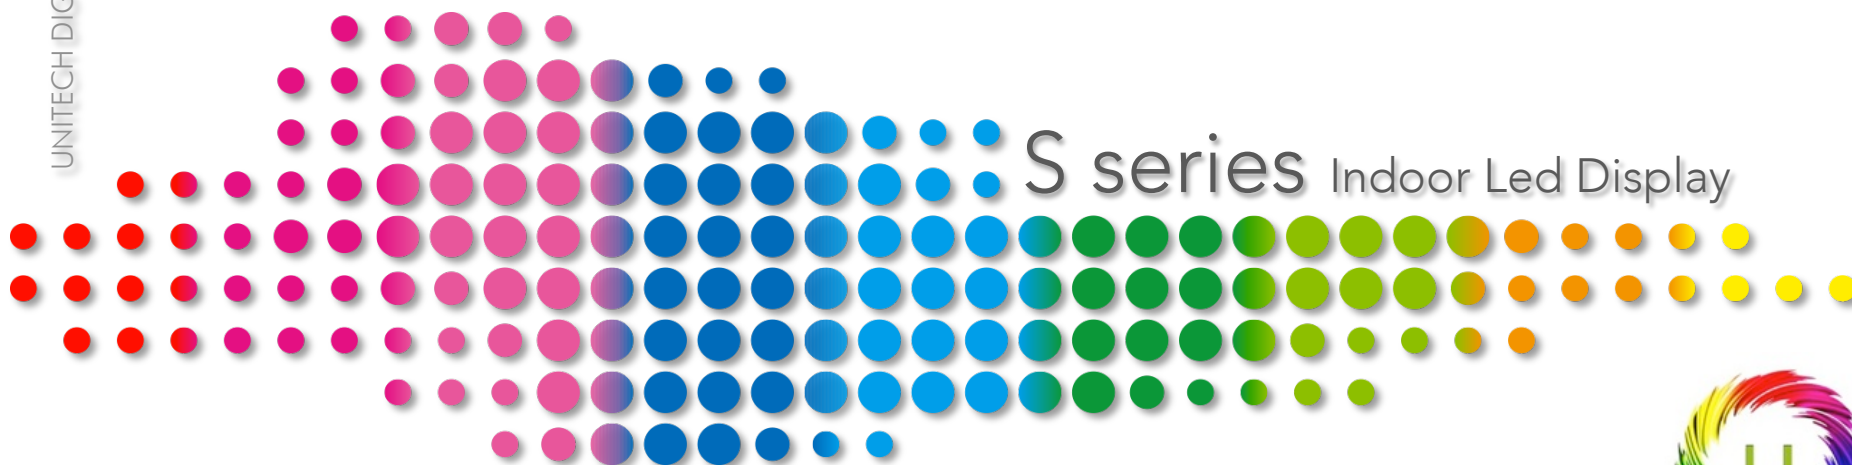


S series

- Multifunction indoor Led Display
- High refresh
- Modularity: module, system, frame, all separate design
- Quick Maintenance: magnetic type and front and rear service
- Lightweight
- Wall Installation
- High brightness



INDOOR FIXED LED DISPLAY

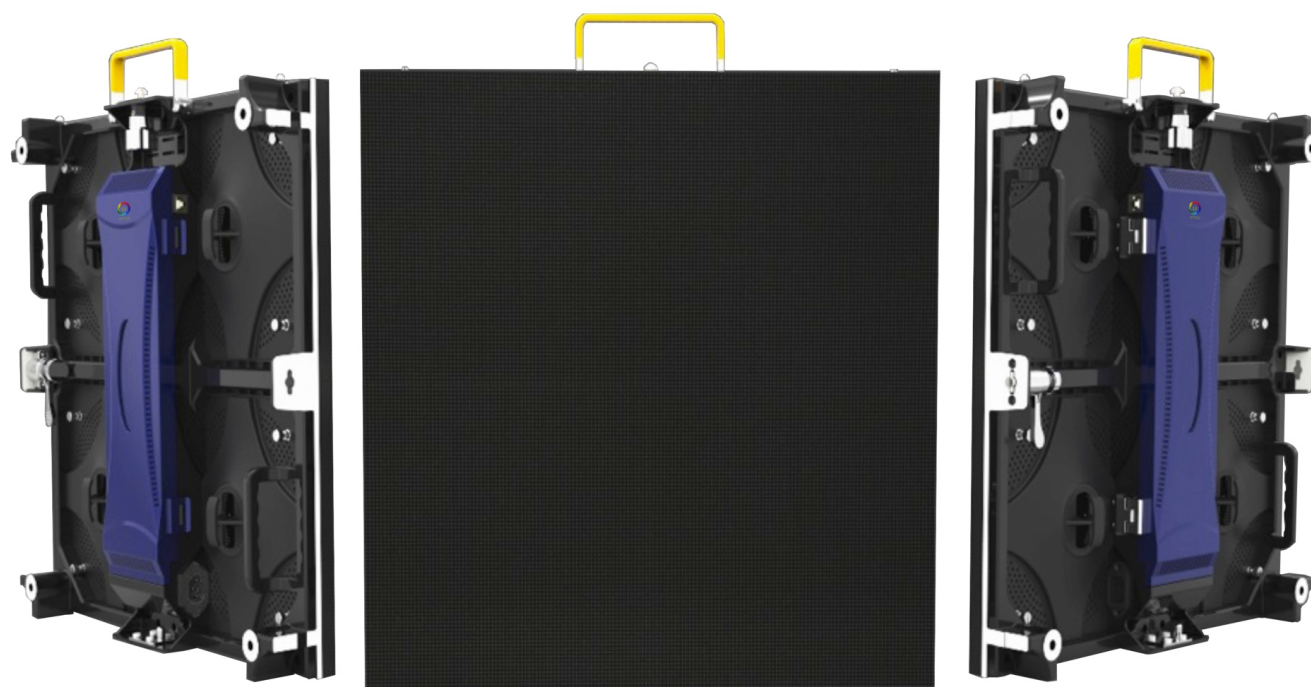

AUTO-LOCK



INTERNET



AC INPUT




AC OUTPUT



S series

CONFIGURATION

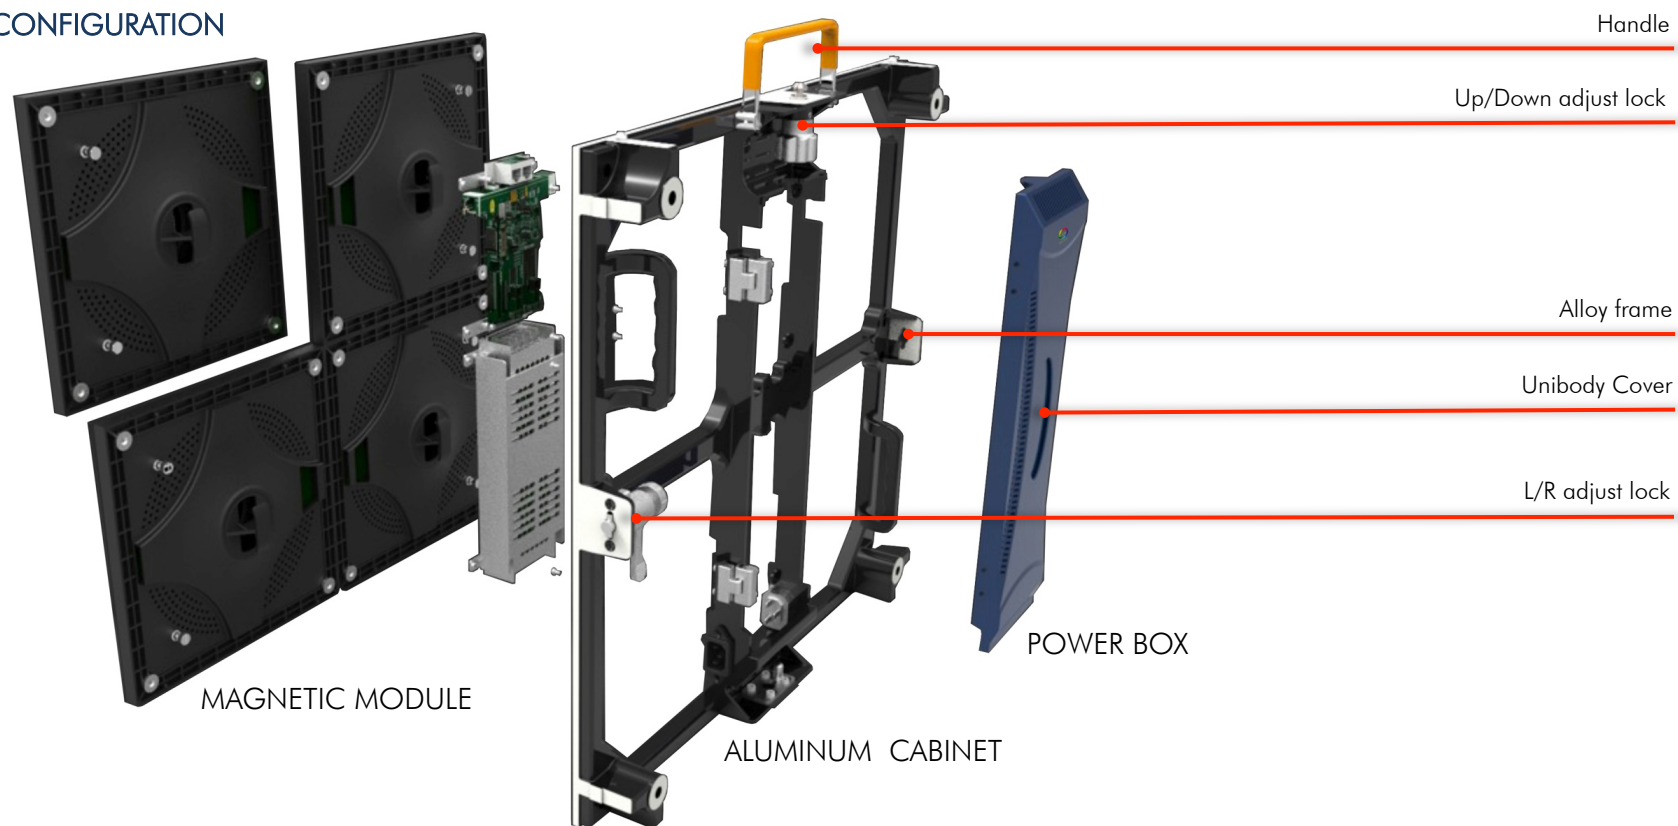

MAINTENANCE

FRONT SERVICE




REGULAR SERVICE



S series


MODULE

- No copper cylinder
- Cost reduction
- Improve stability

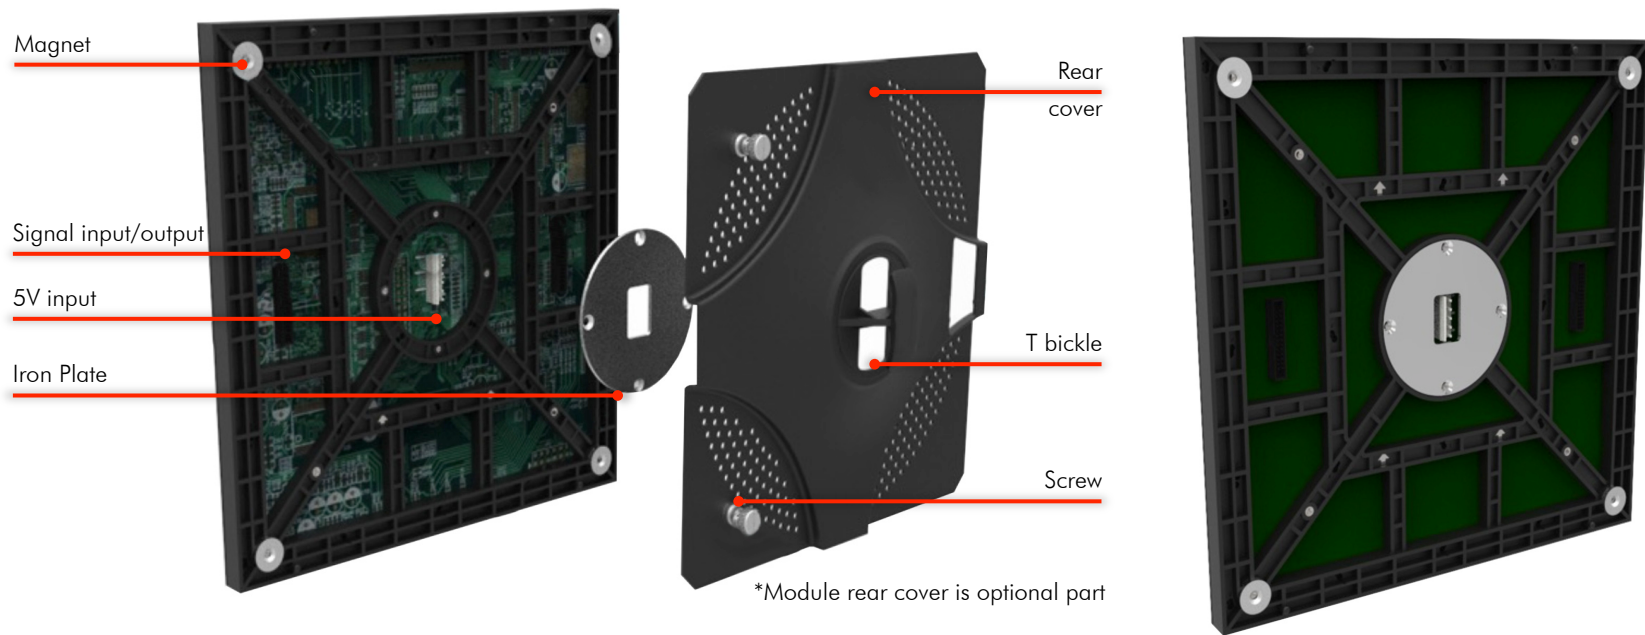

SPECIFICATIONS	S2	S3
Pixel pitch	2.5mm	3.0mm
Pixel Configuration	SMD 2020	SMD 2020
Cabinet pixels	192 x 192/ dots	160 x 160/ dots
Pixel density/mq	160000	111111
Cabinet size	480×480×67mm	
Cabinet Material	Die-cast Aluminum	
Cabinet Weight	5.1 Kg	5.1 Kg
Gray Scale	14	
Color Depth	16384 bit	
Refresh Rate	> 1920 Hz	> 1920Hz
Driving Mode/scan	1/32	1/20
Brightness	900cd/mq	1100cd/mq
Horizontal Viewing Angle	140°	
Vertical Viewing Angle	140°	
DC Input voltage	AC220V+/- 10%	
DC Input power rate	60 Hz	
DC max power consumption	490 W/mq	650 W/mq
DC avg. power consumption	170 W/mq	230 W/mq
Storage Temperature	-10°C to +50°C	
Working Temperature	0°C to +40°C	
Storage Humidity	10% - 90% RH	
Protection Grade	IP40 / IP31	
Working Humidity	10% - 90% RH	
Lifespan	100000 hours	
Installation	Fixed	
Maintenance	Front/Rear	

S series

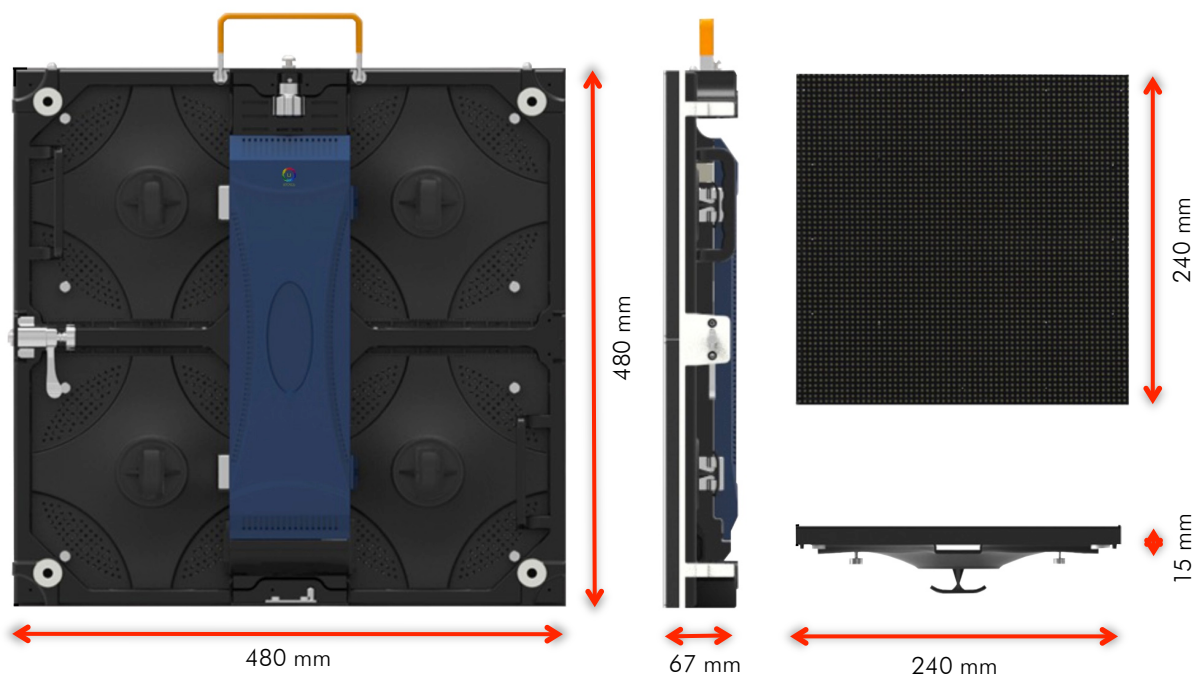

S2 LED DISPLAY S SERIES

SIZE: 18.89"x18.89"x2.63" (480x480x67 mm)

WEIGHT: 11.24 lb (5.1 kg)

ORDER CODE: UNILMS2

S3 LED DISPLAY S SERIES

SIZE: 18.89"x18.89"x2.63" (480x480x67 mm)

WEIGHT: 11.24 lb (5.1 kg)


ORDER CODE: UNILMS3

SModule LED DISPLAY S SERIES

SIZE: 9.44"x9.44"x0.59" (240x240x15 mm)

ORDER CODE: UNILMSMDL

WALL INSTALLATION

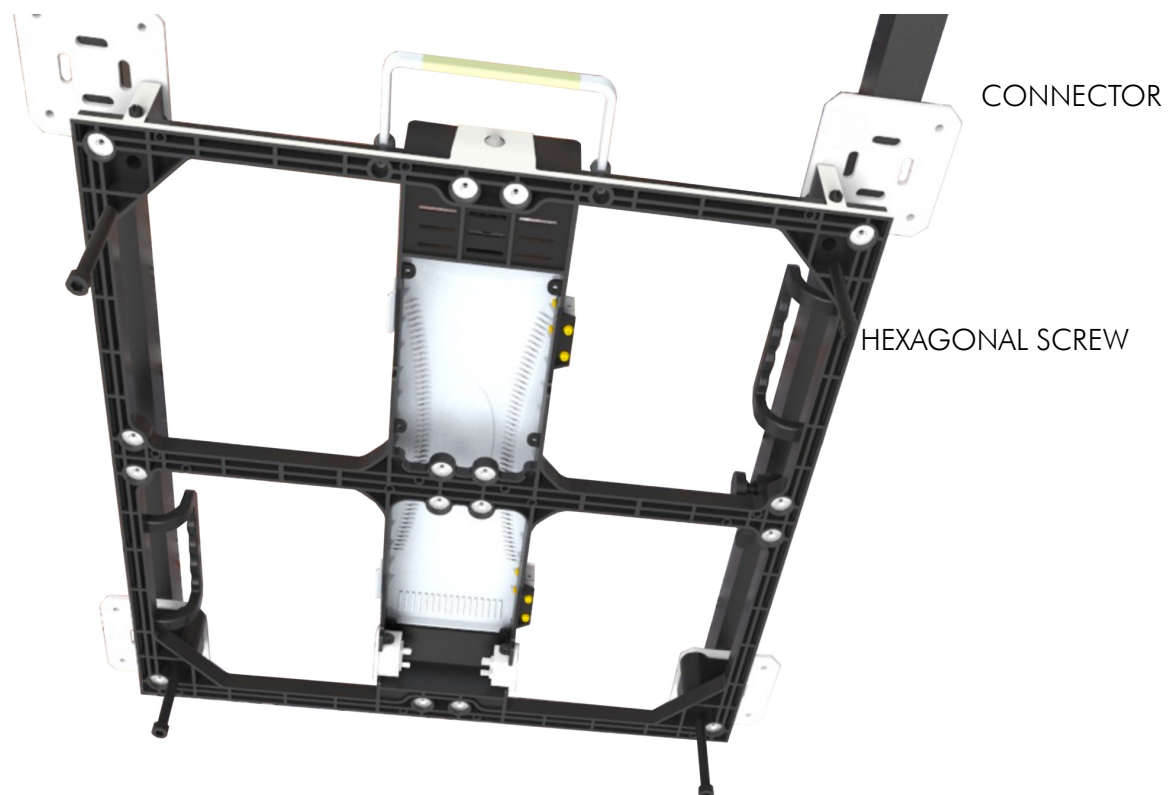

HANGING BAR S SERIES
ORDER CODE: UNIHBS0S