

disPLAYIT + Series Holographic Led Screen

disPLAYIT+ series

HOLOGRAPHIC LED SCREEN

- **Transparent** : without structural skeleton in the middle of the screen, which provides high visual transparency at 90% when glued onto a glass wall.
- **Flexible** : standard modules can be bent, cut, and used flexibly.
- **Light** : weight is only 6Kg/mq
- **Thin** : screen thickness is less than 2mm, which can be seamless surface mount.



LED DISPLAY disPALYIT+ series

SIZE: 1000*250 mm / 1200 *250 mm

SIZE: 1000*400 mm / 1200 *4000 mm / 1500*400 mm

WEIGHT: 6 Kg/mq / 5 Kg/mq

ORDER CODE: UNILMDSP+3 / UNILMDSP+6

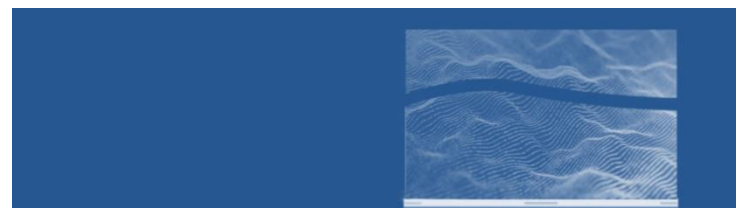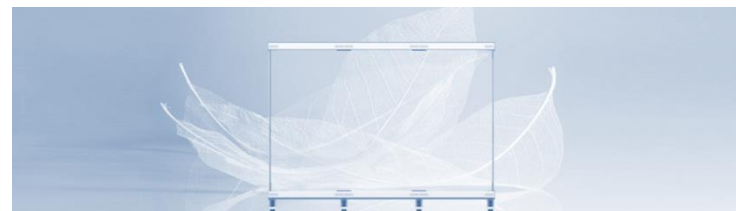

disPLAYIT+ series



Development of driver IC, 16 bit gray level, high refresh rate. Independent core technology, any dead pixel does not affect other lamp beads. Easy maintenance, no need to return to the factory, simple training can be used for on-site maintenance.

Built-in design, integrated lamp driver, single point and single control, each LED lamp bead is a "power source". Make the control more precise and the heat dissipation more uniform. Micron scale light-emitting source, with excellent performance such as transparency, high temperature resistance, moisture resistance, and low power consumption.




disPLAYIT+ series



GLUE ON GLASS

Ultra-clear and ultra-thin, high-transparency and high temperature resistant high-end materials are used. The light board is perfectly designed to easily achieve a permeability of up to 80%. The overall mounting without a structural skeleton, the screen body can be spliced left and right, up and down, and can achieve a display height or width of 2.4-3 meters. Commercial window, glass curtain wall and other indoor and outdoor scenes.

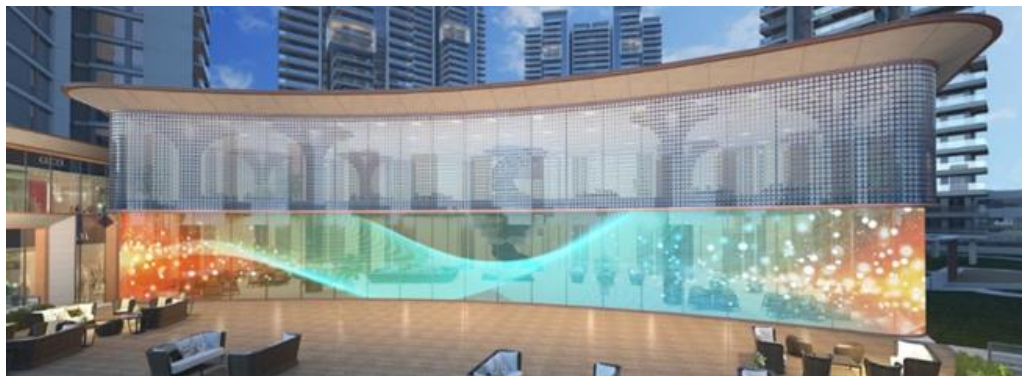

FREE-STANDING

Design for LED poster movable and detachable: display modules can be increased or decreased at any time according to the usage environment like exhibition booth, stage and other scenarios.



HANGING

The product is lightweight and easy to install for stage performance, door curtains show and other advertising scenes.



APPLICATION

used in creative display, comprehensive shopping malls, retail window, exhibition display and other scenes.



disPLAYIT+ series



| | DSP+3 | DSP+6 |
|---------------------------|---|---|
| Pixel Pitch | 3.91 mm | 6.25 mm |
| Transparency | 80% | 90% |
| Pixel Density | 65536 dot/mq | 25600 dot/mq |
| Cabinet size | 1000*250 mm / 1200 *250 mm | 1000*400 mm / 1200 *4000 mm / 1500*400 mm |
| Cabinet resolution | 256*64 dot /300*64 dot | 164*64 dot /192*64 dot / 240*64 dot |
| Weight | 6 Kg/mq | 5 Kg/mq |
| Brightness | >4000 nits | >3500 nits |
| Package form | Light driver integrated package | |
| Scan mode | Single point single control, static drive | |
| LED Lifespan | ≥ 100,000.00 hours | |
| Grayscale | 65536 | |
| Maximum Power Consumption | 800 W/mq | |
| Average Power Consumption | 200 W/mq | |
| LED Controller | Synchronous/Asynchronous | |
| Input Current | AC100~240V 50/60 Hz | |
| Module Working Current | DC 4.2V ± 0.2V | |

RoHS FCC CE

BS476:
Part7: 1997

The products meet the requirements of domestic and foreign industry standards, and have obtained various certifications such as CCC, CE, FCC, ROHS, and flame retardant testing.





Head office

E-mail : info@unitechdigitalmedia.com

Add : Corso Italia 431A, Quarto 80010 (Napoli) Italy

Tel : +39 - 335-8010444 | +39 - 081-8063500

WEB: <https://unitechdigitalmedia.it>

<https://www.unitech.lighting>



Doha Commercial Representative

Contact : Renato Febbraio

E-mail : Renato@unitechdigitalmedia.com

Add : P.O. Box 30084 Doha Qatar

Tel: + 974 4441 7005 | +974 5018 8831 | +974 3303 6348

