


TPro LED Series

TRANSPARENT RENTAL SCREEN

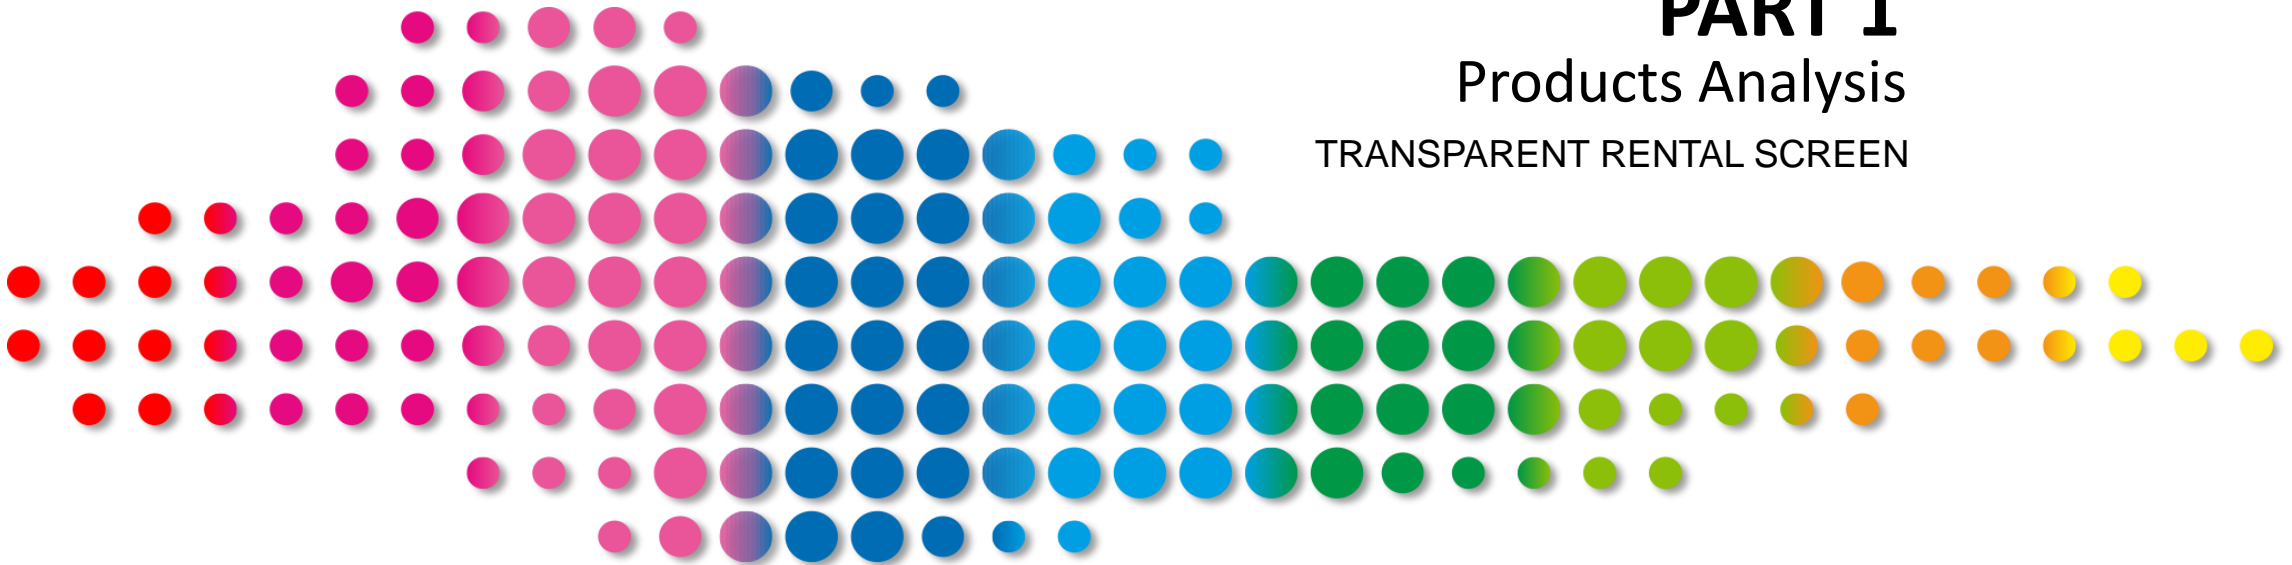


PART 1

Products Analysis

TRANSPARENT RENTAL SCREEN


TPro LED Series

- A Simplify Frame Design
- B Wireless connection
- C Diecast Aluminium
- D Strong & Robust
- E Auto quick vertical lock
- F High End High Quality
- G HD OutDoor & InDoor use
- H Buckle Mask Design

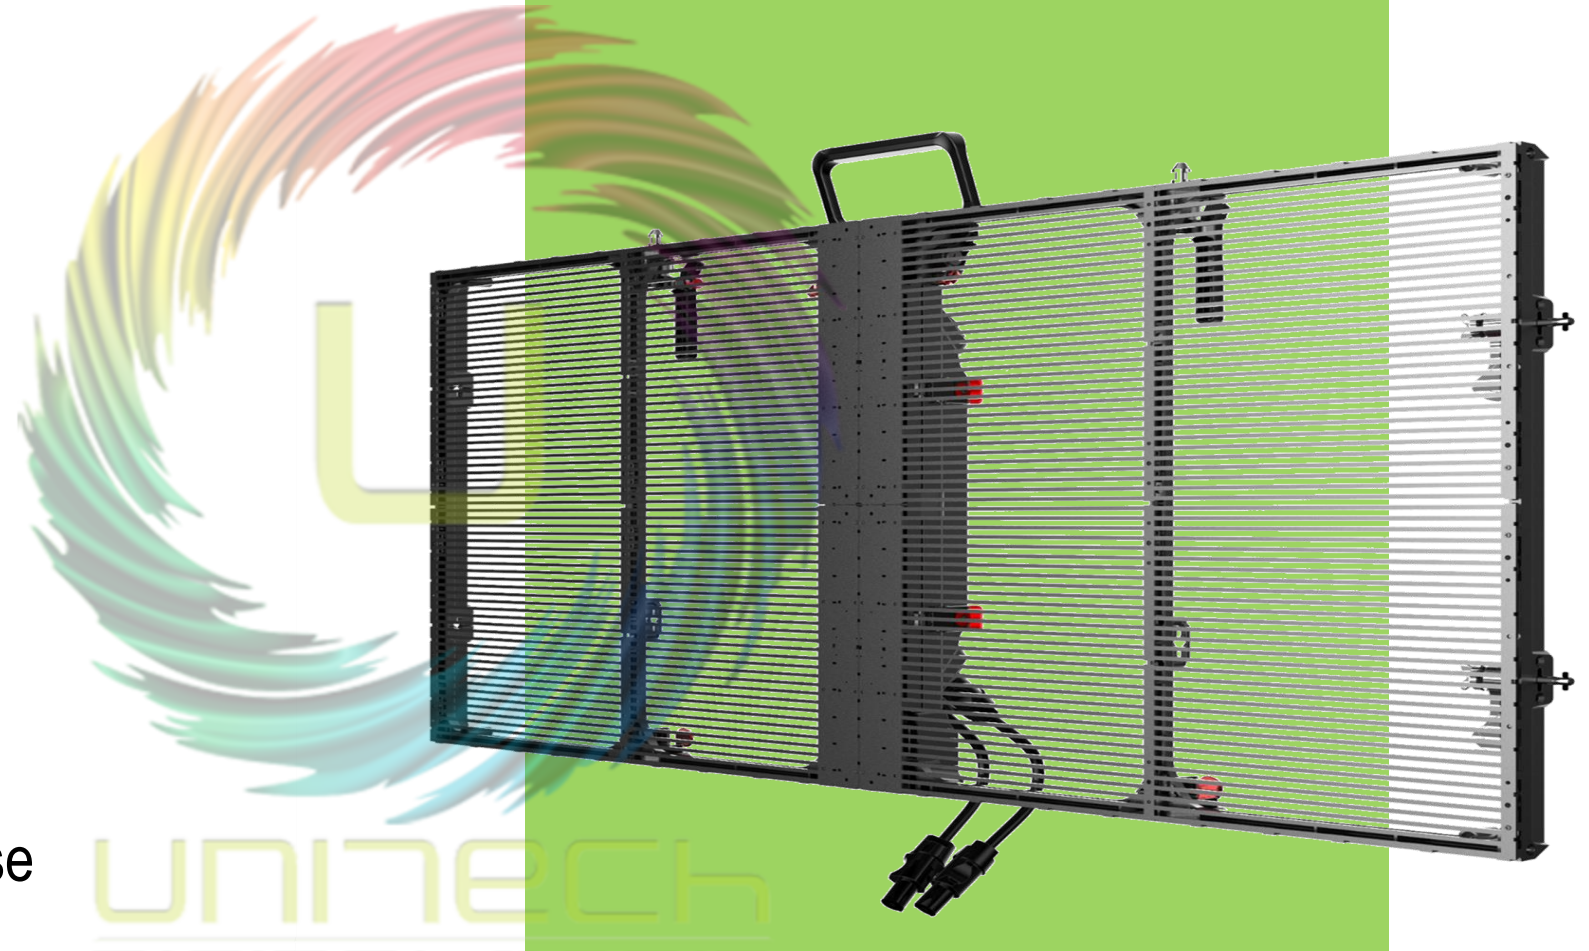

TPro LED Series

Rental

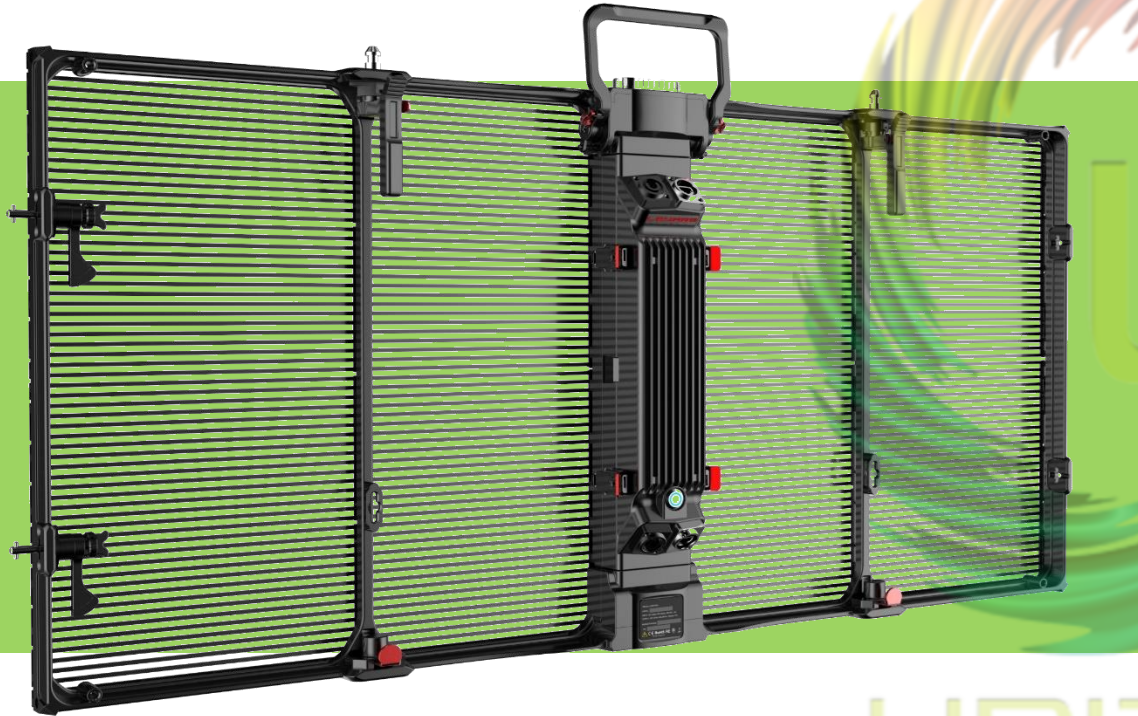

- A Easy & Fast Maintenance
- B Improved low latency for Event
- C High Refresh Rate
- D Black Cabinet greatly improves contrast
- E Dislocation Installation
- F Low Wind Load flow through module design
- G No Reflection make the visual effect impressive
- H One Person 8S Fast Install


unitech
DIGITALmedia



TPro LED Series

Buckle Mask Type


Outdoor Led RentalTransparent Screen

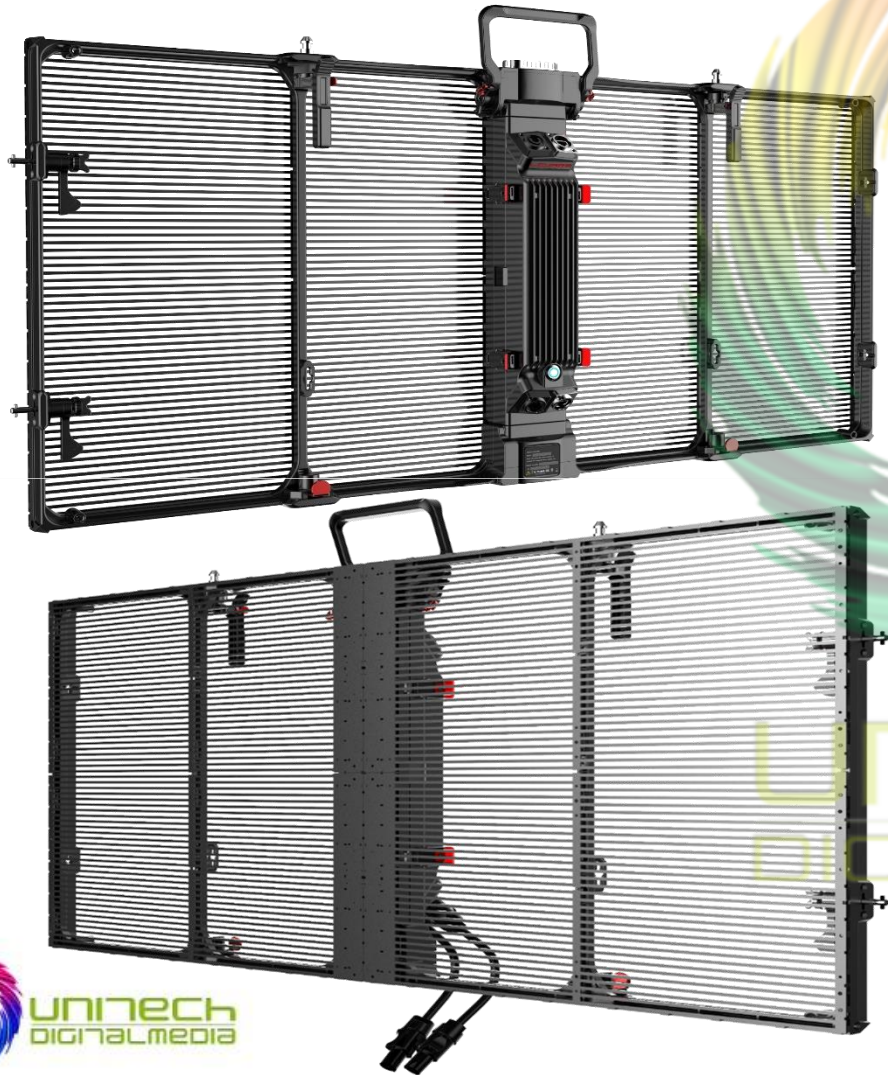

Port Number	T Pro-F3.9	TPro-F7.8	TPro-F10.4
Pixel Pitch	3.9683*7.8125mm	7.8125mm	10.4167mm
LED Configuration	SMD1921	SMD1921	SMD1921
Brightness	4000-4500CD/m ²	4000-4500CD/m ²	4000-4500CD/m ²
Pixel Density	32256dot/m ²	16384dot/m ²	9216dot/m ²
Transparency	≥65%	≥70%	≥80%
Cabinet Size	1000×500×76mm	1000×500×76mm	1000×500×76mm
Cabinet Resolution	252×64dot	128×64dot	96×48dot
Cabinet Weight	6.5kg	6.5kg	6.5kg
IP Rating	IP54	IP54	IP54
Environment	Outdoor	Outdoor	Outdoor
View Angle(V/H)	140° /140°	140° /140°	140° /140°
View Distance	4m	8m	10m
Grey Scale	16bit	16bit	16bit
Max Consumption	600W/m ²	600W/m ²	600W/m ²
Ave Consumption	220W/m ²	220W/m ²	220W/m ²
Refresh Rate	3840Hz	3840Hz	3840Hz
Input Voltage	AC110~ 240V, 50/60Hz		
Control Mode	Synchronous display with control PC By DVI/Aynchronous		
Input Signal	Composite,S-Vido,Component,VGA,DVI,HDMI,HD_SDI		
Temperature (work/store)	0° C~40° C(work) , - 20° C~60° C(store)		
Humidity (work/store)	35%~85%(work),10%~90%(store)		
Operating Life	≥100,000hours		
Cabinet Material	Die-casting Aluminium		
Installation Methord	Hanging/Stacking		


SIMPLIFY FRAME DESIGN

- Simplify Frame Structure
Lightweight 6.5Kgs/Panel

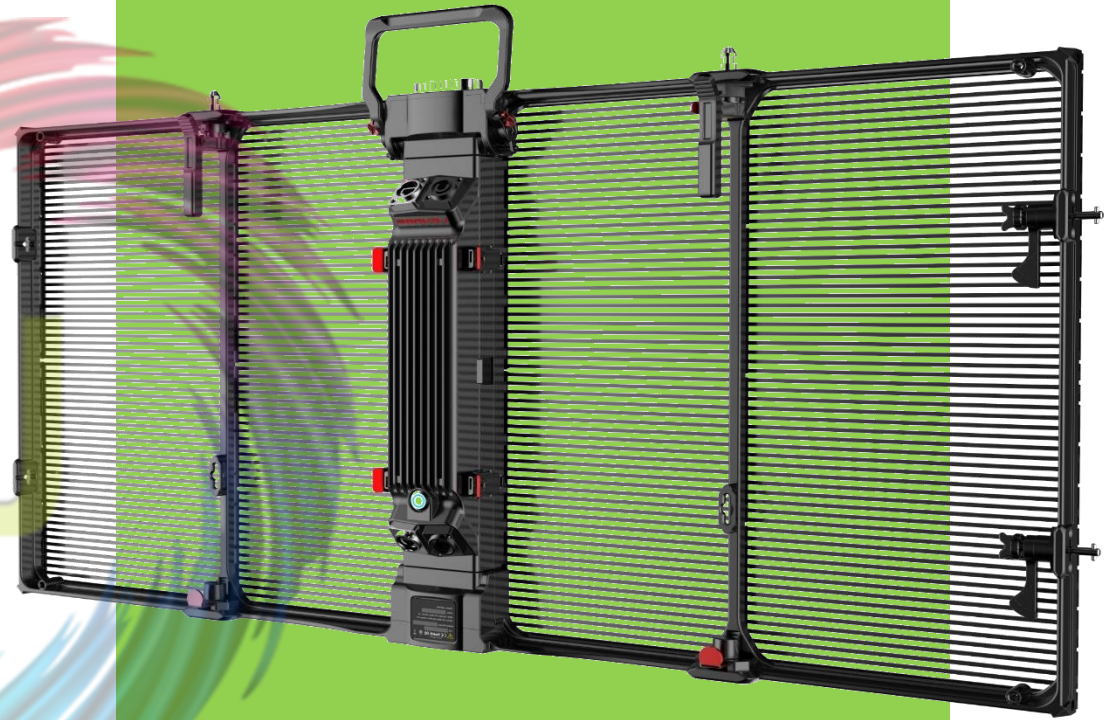

unitech
digitalmedia



SIMPLIFY FRAME DESIGN

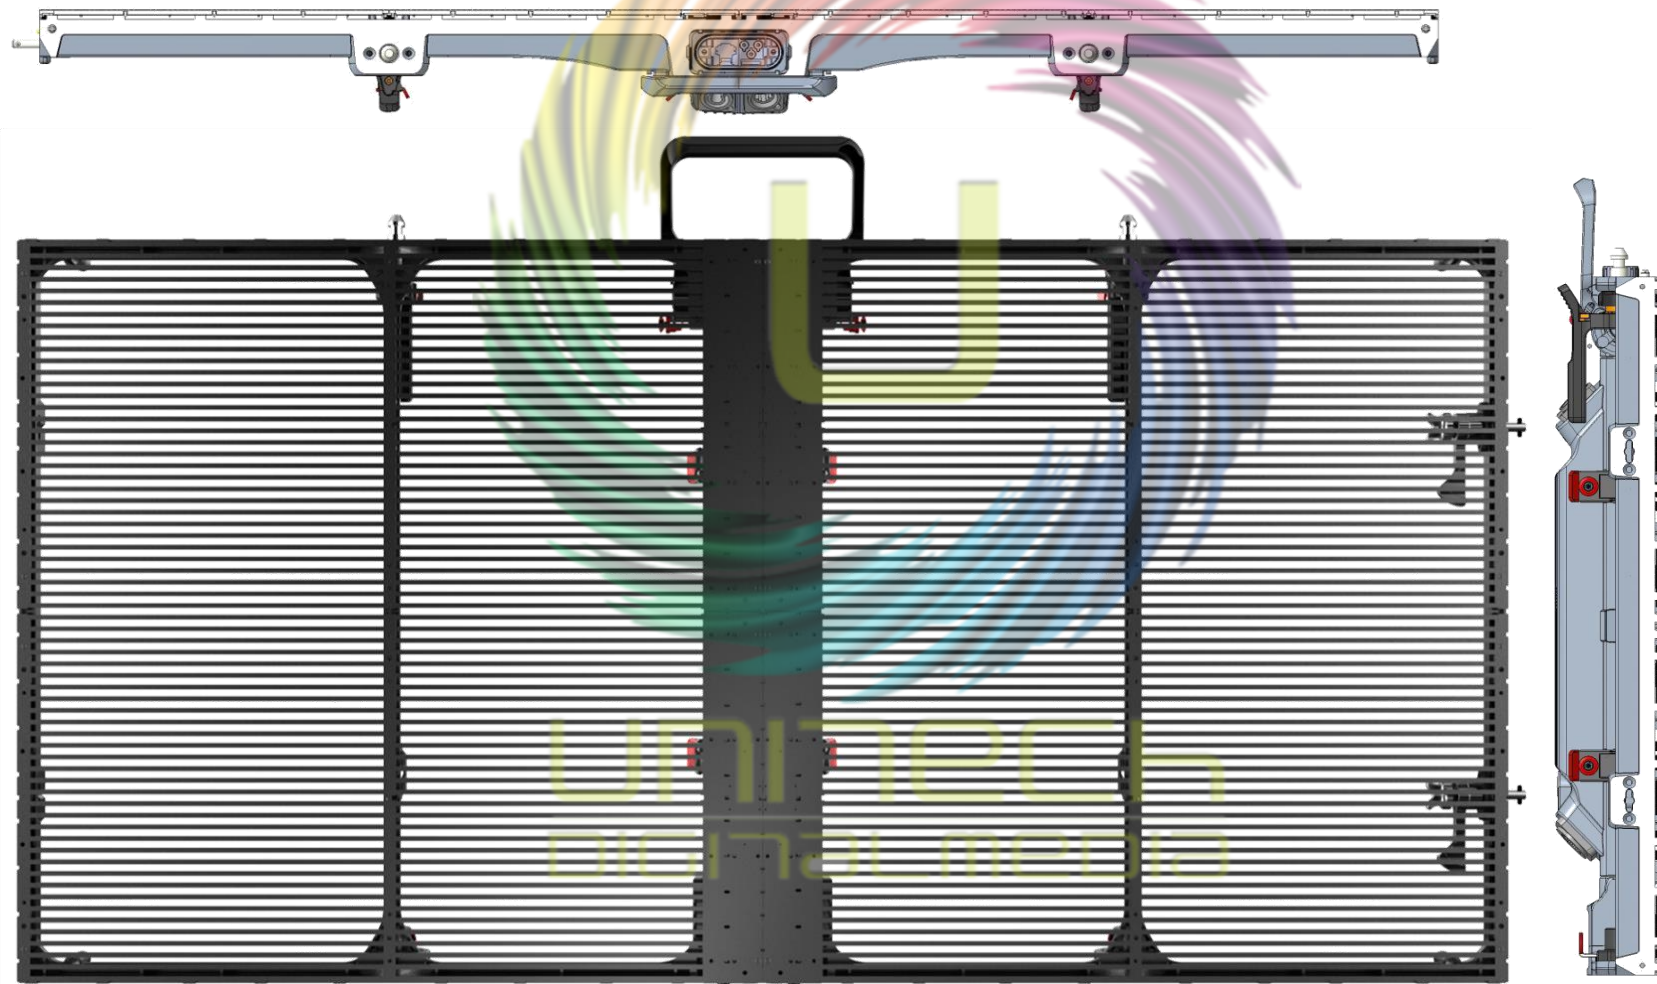


CABLE FREE CLEAN OUTSIDE AIR PLUG OPTIONAL



● Wire/Wireless Connection
(Not dislocation installation)

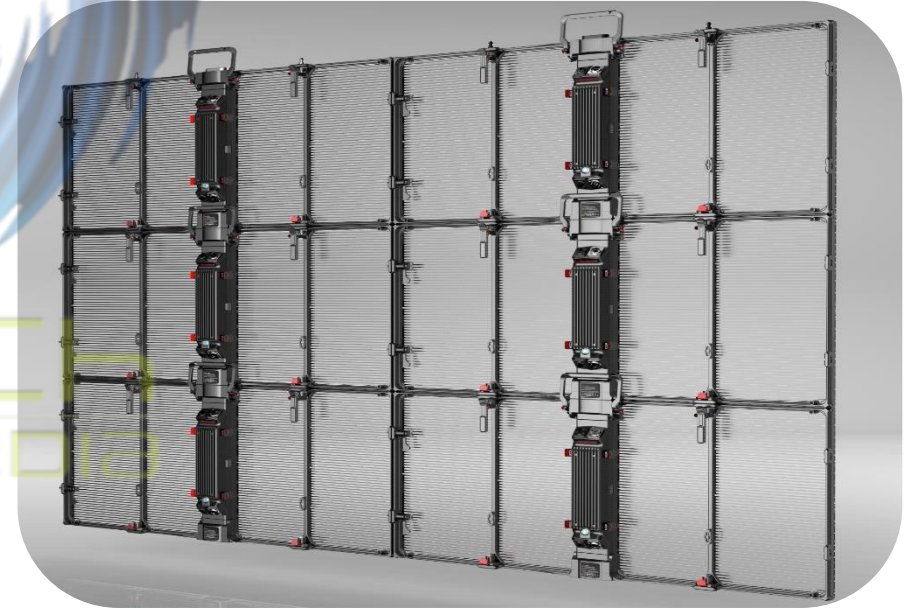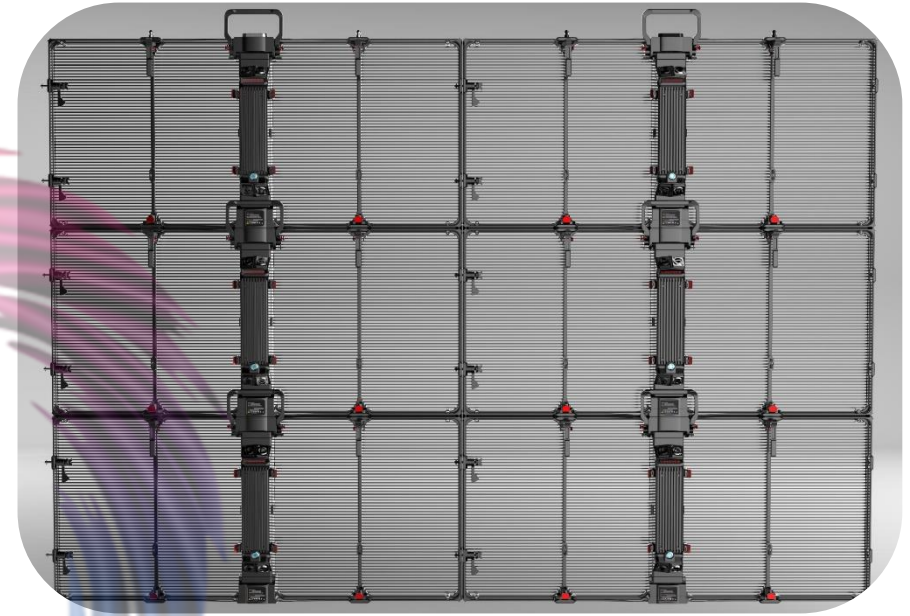

QUICK AUTO VERTICAL LOOK

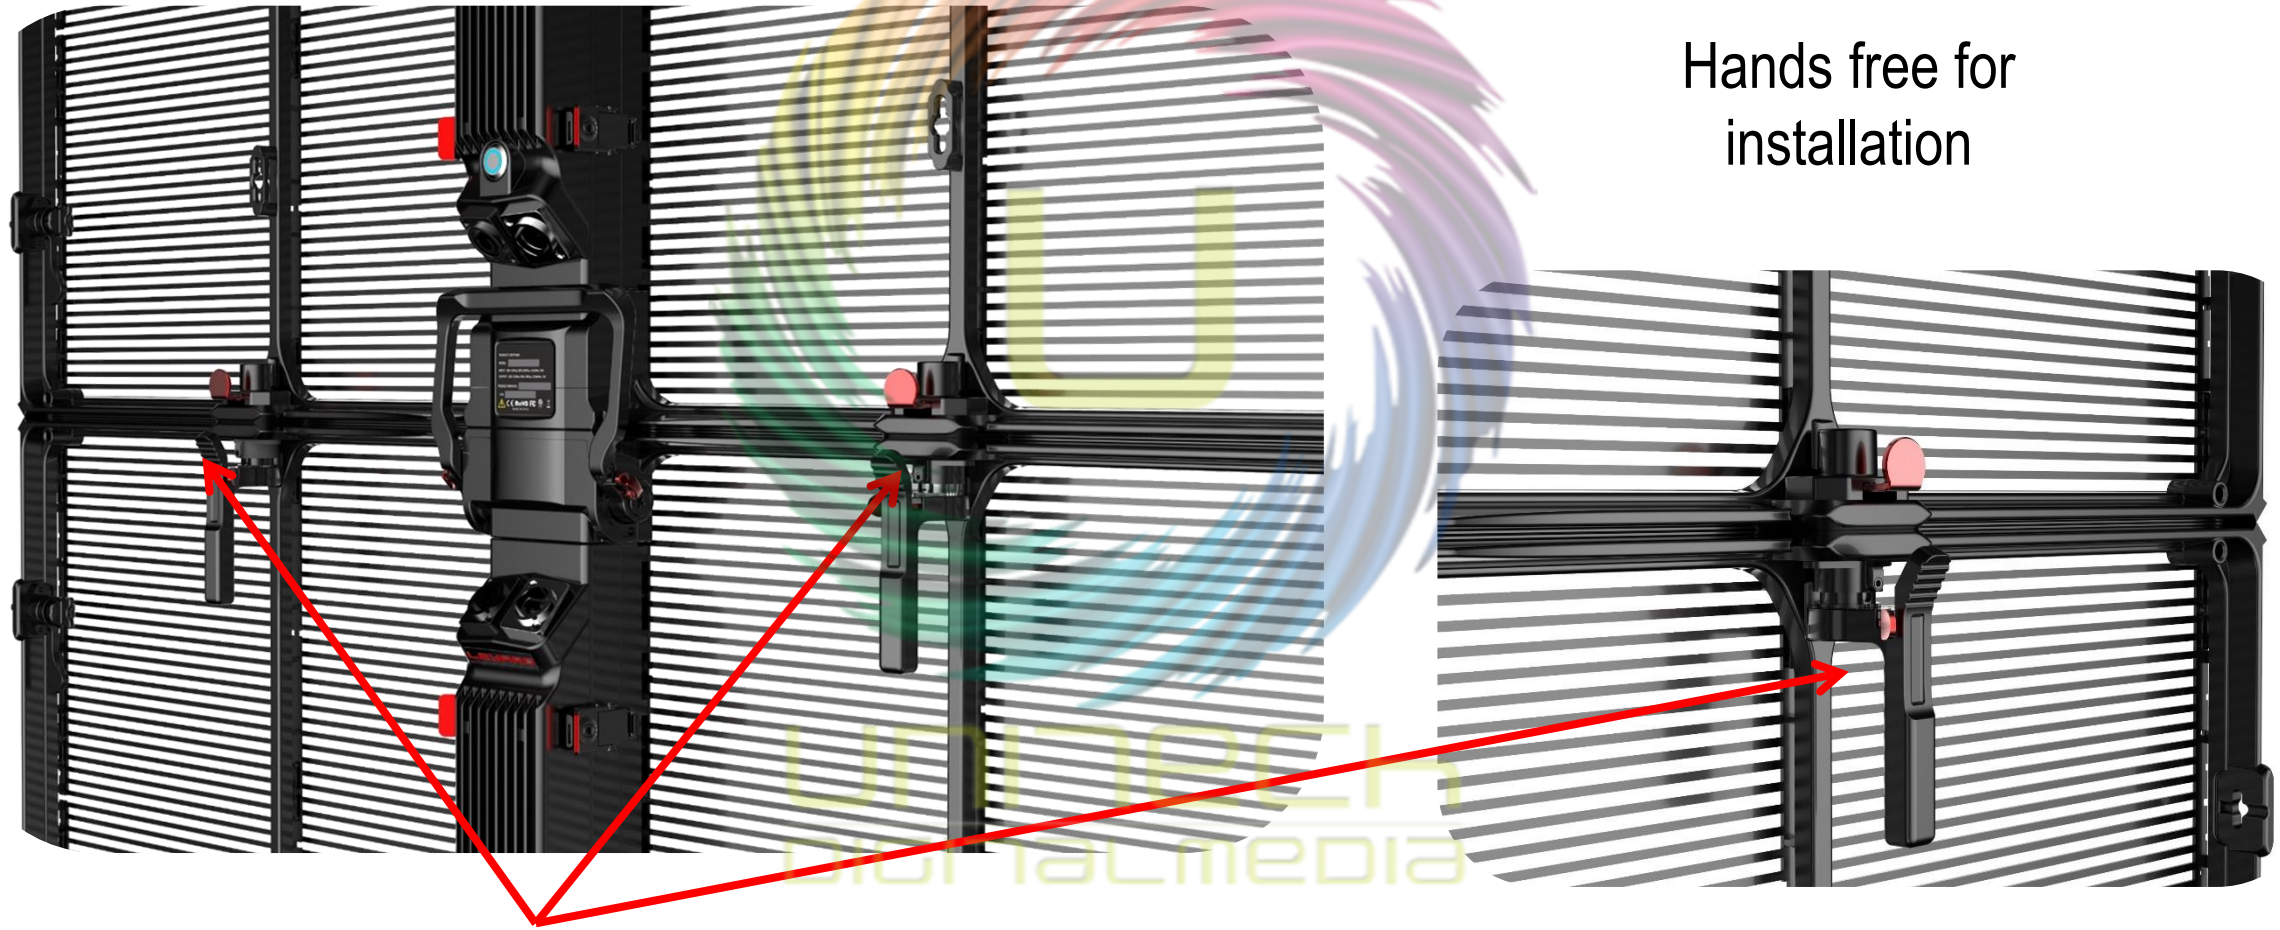

Hands free for
installation


Handle

Integrated Design

BUCKLE MASK DESIGN

No Transparent PC Board



- Take out the traditional mask which is fixed by screws, replace by buckle, so wind can flow through screen to reduce wind stress.
- Better visual effect by reducing light reflection.

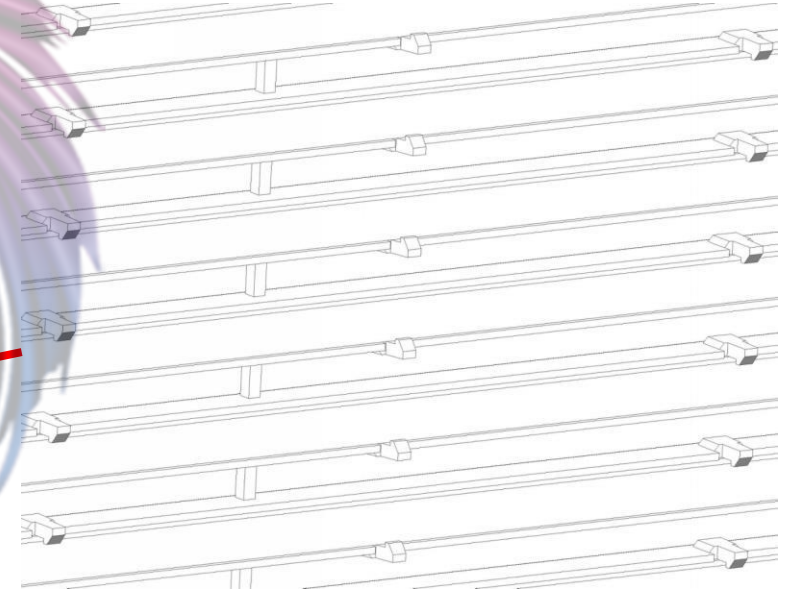

EASY QUICK MAINTENANCE


One person quick and simple maintenance

- Rotate the maintenance tool through the hole
- Fast disassembly & assembly module

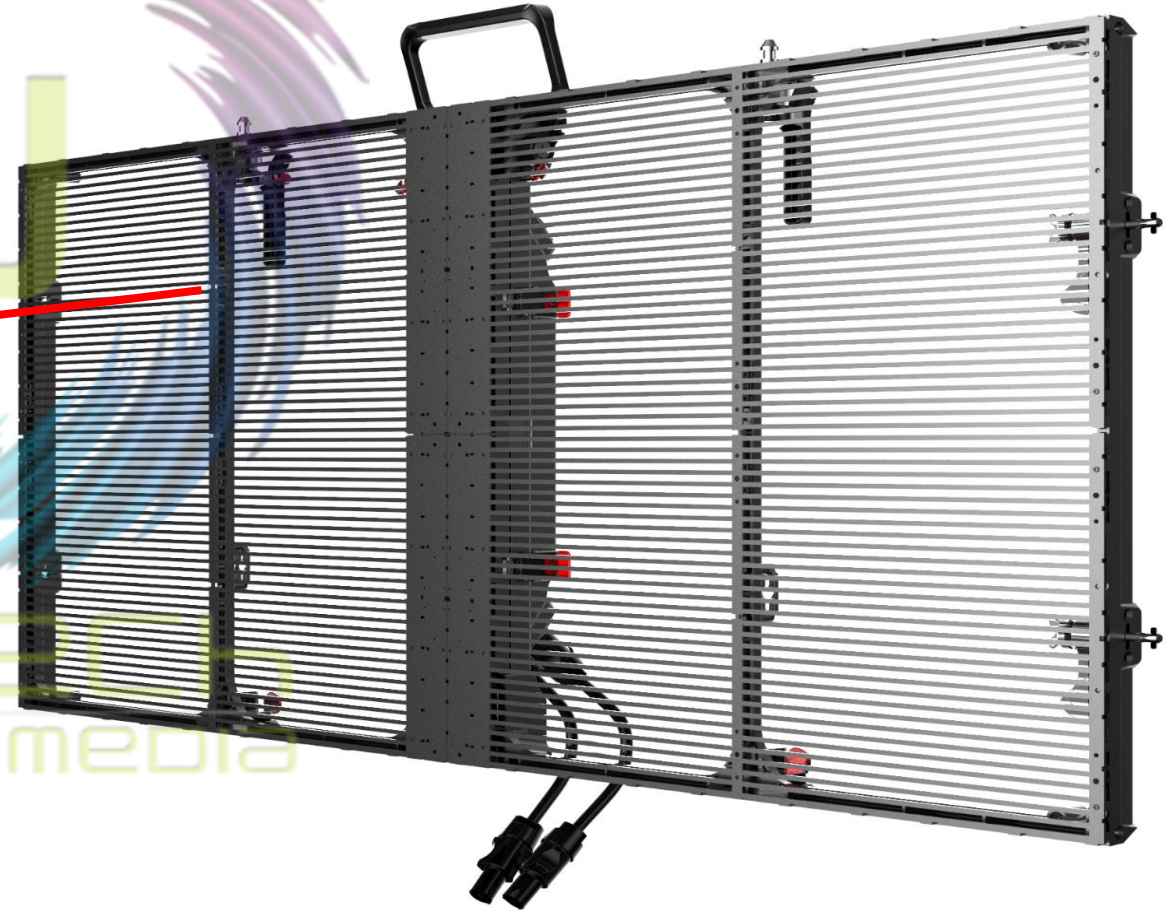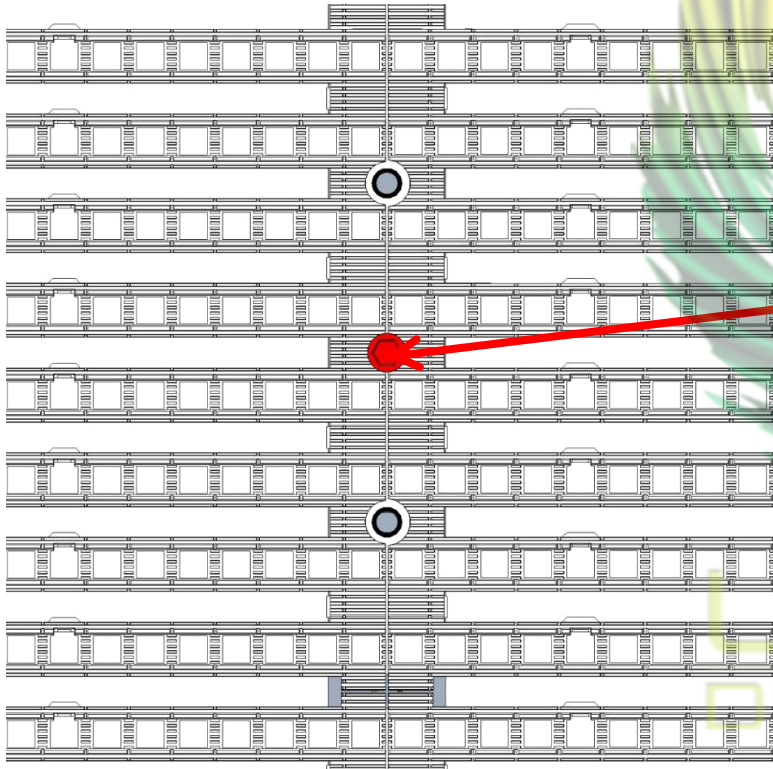

HANDLE DESIGN


Easy transportation and installation

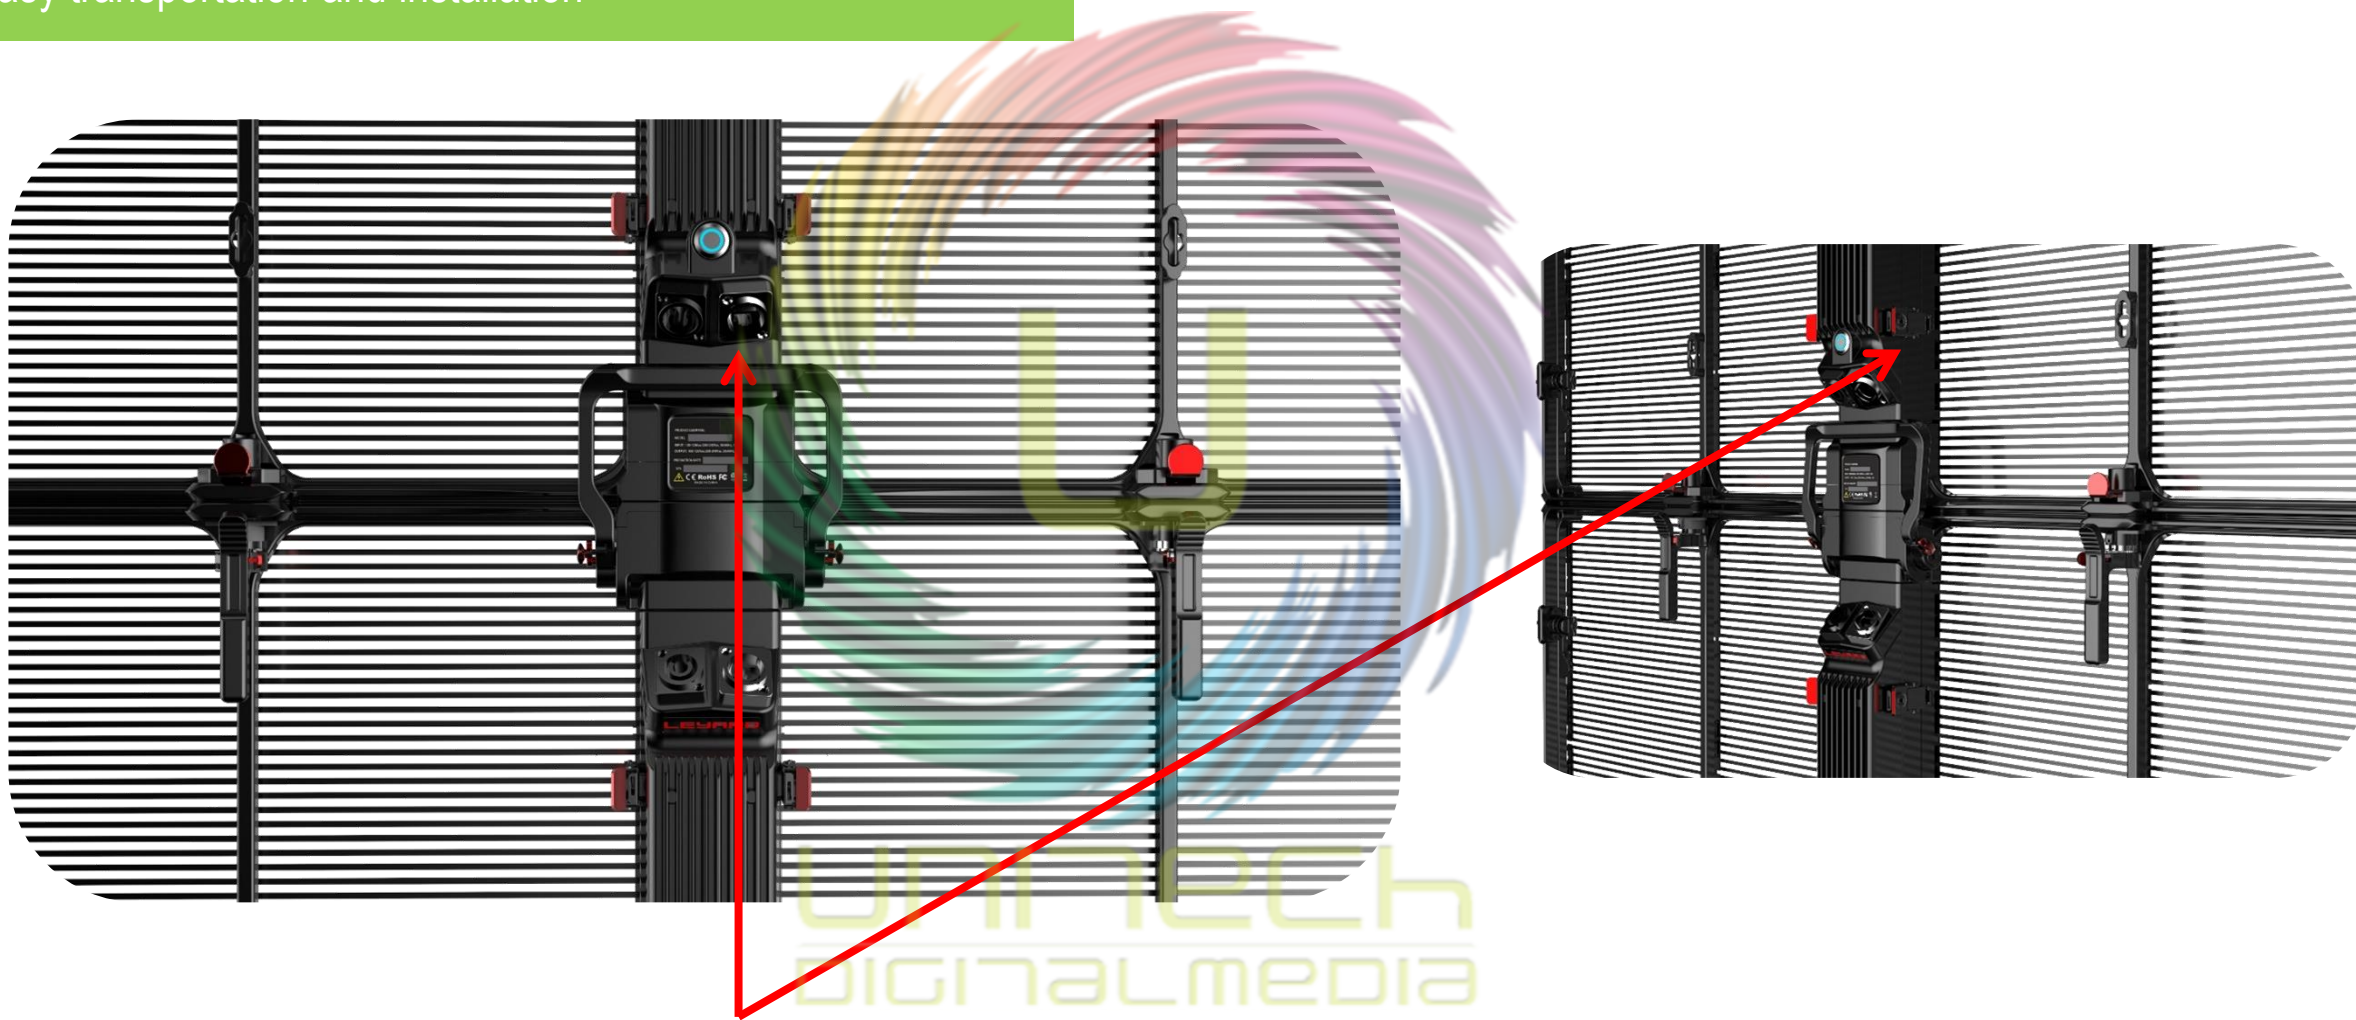

Wireless connection between cabinets

DISLOCATION INSTALLATION

- Cabinets can be connected by cable, if cabinets are installed in dislocation.

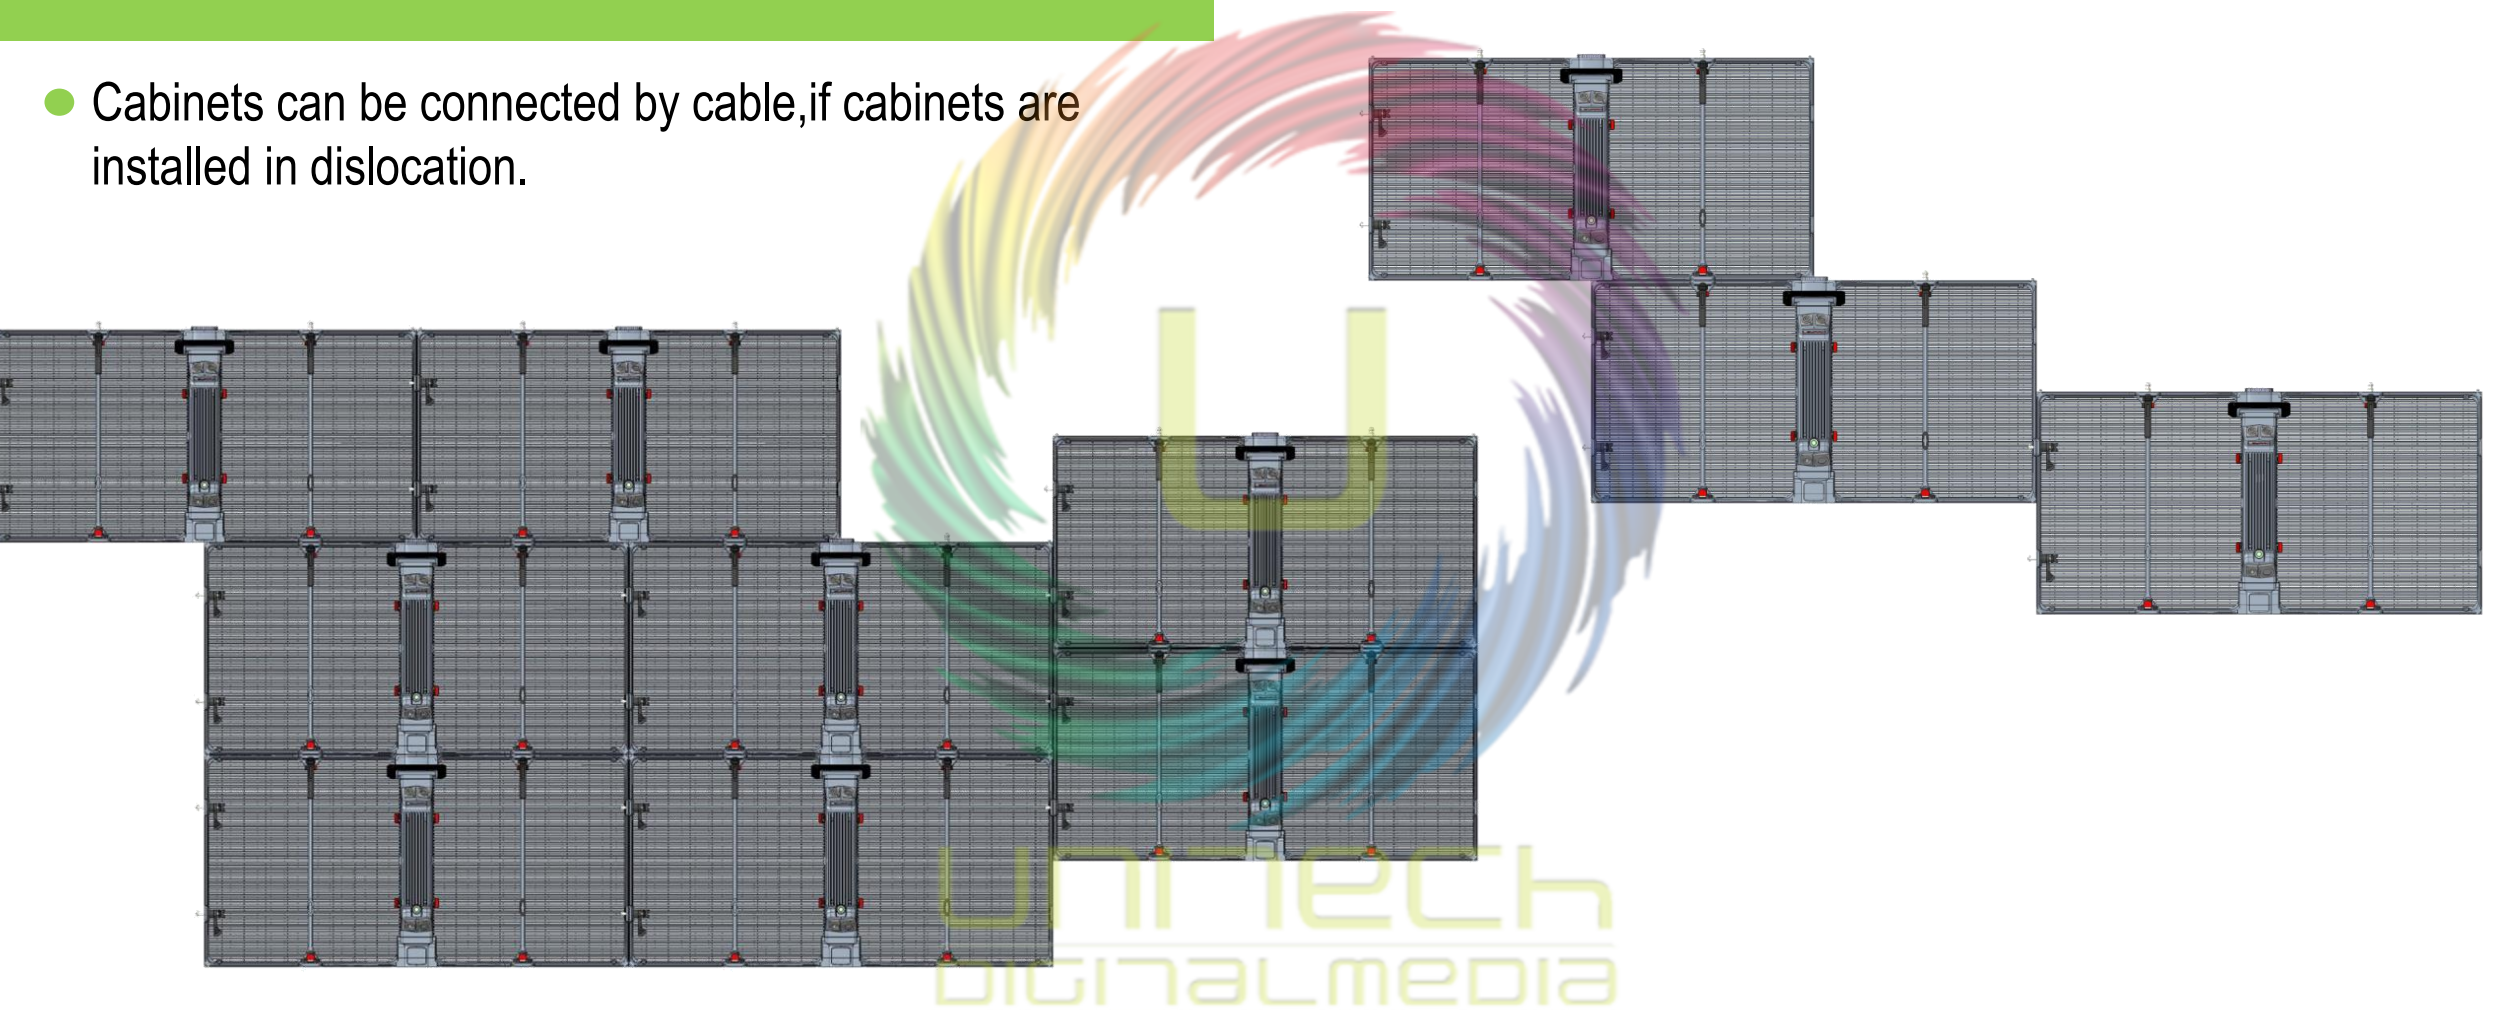

NEW QUICK LOCK DESIGN

- New Quick lock design between the cabinets will shorten the installation time and reduce the personnel, making the operation easier.





Unitech Digital Media srl

Via della Costituzione Isola A3
80121 Napoli (NA)
(+39) 0818063500
info@unitechdigitalmedia.com

Via Achille Grandi, 4
Peschiera Borromeo

