

# Standalone Controller

Led Controller



# Standalone Controller

## FEATURES

- AS4 controller is a new generation live or standalone 4DMX universes interface.
- The Ethernet port can be used for live mode under the LED software.
- The built in slot for SD card allow user to run lighting effects without computer.
- The DMX IN function allows user can trigger lighting effects by external device.
- User can preprogram lighting effects Software and save into SD card.
- User can do a standalone playback schedule in the Timeline of Software.
- With the Clock design built in controller, user can run different effects at different time.
- User can connect multiple AS4 controllers and run them together in synchronous mode.
- User can update the firmware of controller once we have new version released.

FRONT VIEW




BACK VIEW



## SPECIFICATIONS

	AS4
Power Input	10-24VDC
Input Protocol	ARTNET/SD Card/DMX IN
Output Protocol	DMX512
Refresh Rate	40Fps
Default IP	192.168.1.100
Default Subnet	255.255.255.0
Cable	Net cable
DMX512(Out)	4x512 Channels
Ethernet Port	RJ45
DMX512 Ports	3 Pin/5 Pin XLR Female
SD Card	Max 32 Gb
Housing	Black Metal
IP	IP20
Dimension	110x101x43 mm
Dimension	134x101x43 mm
Certificate	CE

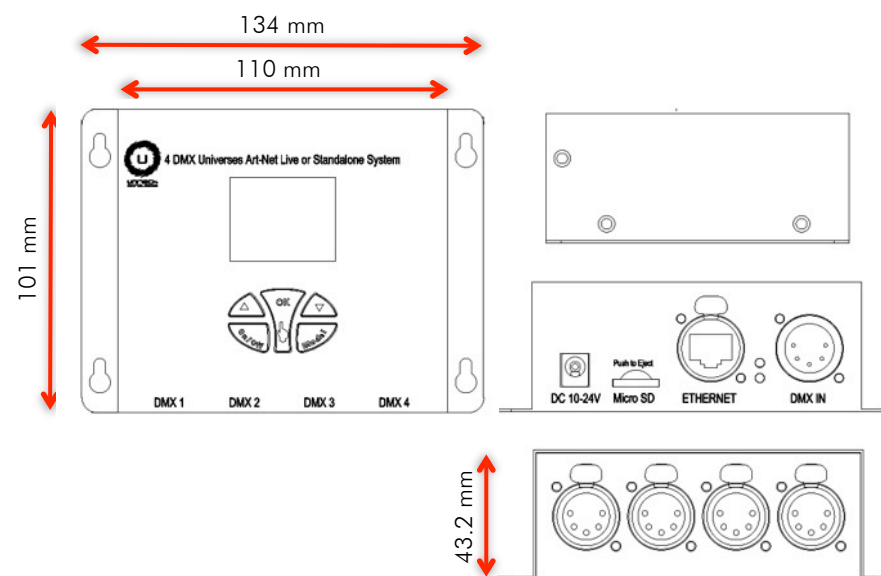

### AS4 STANDALONE CONTROLLER

**SIZE:** 5.27"x3.97"x1.69" (134x101x43 mm)

**ORDER CODE:** UNILCAS4